


Disconnect Terminals

ASK 2 B

Width: 8 mm

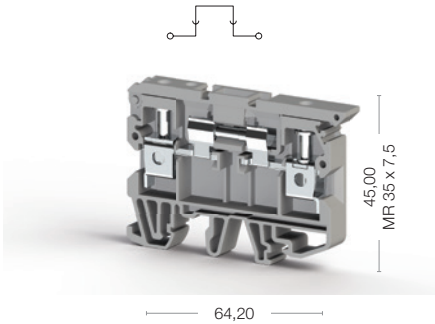


Cat No:

- 360 119
- 360 110

AVK 2,5 A

Width: 5 mm

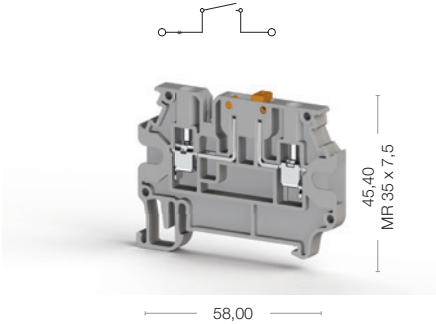

Cat No:

- 304 419
- 304 410



Electrical Ratings
CE (EN 60947-7-1)
UL
VDE (IEC 60947-7-1)
CSA
ATEX

Connection Data
Conductor cross section solid (min.-max.)
Conductor cross section stranded (min.-max.)
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, (min.-max.)
AWG Conductor
Insulation Stripping Length (min.-max.)
Torque (min.-max.)
Screwdriver

End Plate

Push-in Cross Connection

Technical Data
Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type
Marking Tags (Dekafix)
See pages 326-333 for a list of Dekafix
Package Quantity

Voltage, V ~	Current, A	Cross-Section
500	6,3	6 mm²
300	6,3	AWG 26-8

0,2-10 mm²
0,2-10 mm²
0,5-4 mm²
AWG 24-8
10-12 mm
0,8-1,2 Nm
IKTD 3 (0,6x3,5)

Type	Order No	Qty.
NPP/ASK 2	450 049	25

Type	Order No	Qty.
UK 2,5/2	476 222	25
UK 2,5/3	476 223	20
UK 2,5/4	476 224	15
UK 2,5/10	476 229	5
UK 2,5/16	474 260	10
UK 2,5/20	474 200	10

6/3
1/B5
IP 20 / -
DB 5

25 pcs.

Voltage, V ~	Current, A	Cross-Section
500	16	2,5 mm²

0,2-4 mm²
0,2-4 mm²
0,5-1,5 mm²
AWG 24-12
9-10 mm
0,4-0,6 Nm
IKTD 3 (0,6x3,5)

Type	Order No	Qty.
NPP/AVK 2,5 A	450 330	25

Type	Order No	Qty.
UK 2,5/2	476 222	25
UK 2,5/3	476 223	20
UK 2,5/4	476 224	15
UK 2,5/10	476 229	5
UK 2,5/16	474 260	10
UK 2,5/20	474 200	10

6/3
1/A3
IP 20 / -
D-NS 5x10, DB 10/5, DG 10/5, DG 10/5T SLF-P1 W

50 pcs.
