


Disconnect Terminals

ASK 4 B

Width: 10 mm

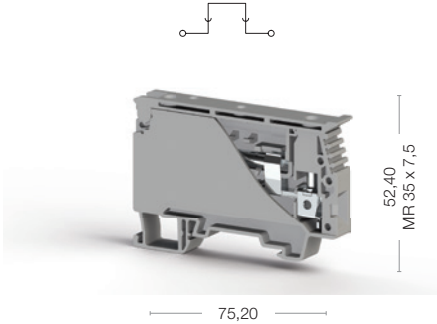


Cat No:

- 360 129
- 360 120

ASK 3 FB

Width: 6,2 mm

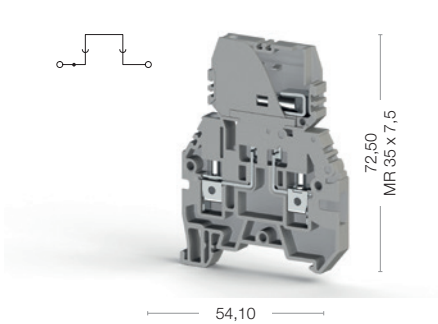

Cat No:

- 362 009
- 362 000



Electrical Ratings
CE (EN 60947-7-1)
UL
VDE (IEC 60947-7-1)
CSA
ATEX

Connection Data
Conductor cross section solid (min.-max.)
Conductor cross section stranded (min.-max.)
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, (min.-max.)
AWG Conductor
Insulation Stripping Length (min.-max.)
Torque (min.-max.)
Screwdriver

End Plate

Push-in Cross Connection

Technical Data
Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type
Marking Tags (Dekafix)
See pages 326-333 for a list of Dekafix

Package Quantity
20 pcs.

Voltage, V ~	Current, A	Cross-Section
750	6,3	6 mm²
600	6,3	AWG 22-8

0,34-10 mm²
0,34-10 mm²
0,5-4 mm²
AWG 22-8
9-10 mm
0,5-0,8 Nm
IKTD 3 (0,6x3,5)

6/3
1/B5
IP 20 / -
D-NS 8x10, DG 10/8

20 pcs.

Voltage, V ~	Current, A	Cross-Section
500	16	4 mm²

0,2-6 mm²
0,2-6 mm²
0,5-2,5 mm²
AWG 24-10
9-10 mm
0,5-0,8 Nm
IKTD 3 (0,6x3,5)

Type	Order No	Qty.
NPP/ASK 3	450 059	10

UK 4/2	476 232	25
UK 4/3	476 233	20
UK 4/4	476 234	15

6/3
1/A4
IP 20 / -
DB 5, DB 10/6, D-NS 6x10, DG 10x6T

20 pcs.
