


AVK T Series Earth Terminals


AVK 2,5 / 4 TK

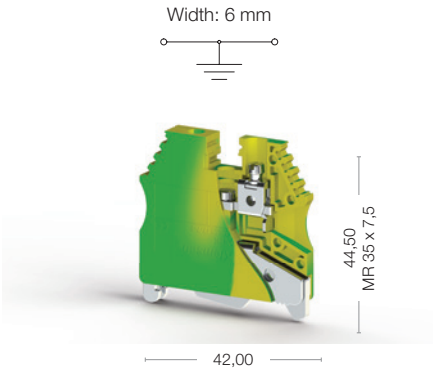

Cat No:

334 450

AVK 6 TK

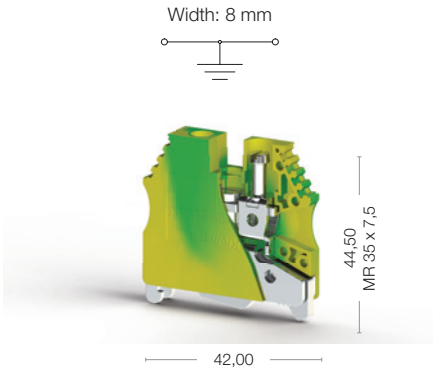

Cat No:

334 460



Electrical Ratings
CE (EN 60947-7-2)
UL - CuLus
VDE (IEC 60947-7-2)
CSA
ATEX

Connection Data
Conductor cross section solid (min-max.)
Conductor cross section stranded (min-max.)
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, (min-max.)
AWG Conductor
Insulation Stripping Length (min.-max.)
Torque (min-max.)
Rail Tightening torque, (min-max.)
Screwdriver

Technical Data
Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type
Marking Tags (Dekafix)
See pages 326-333 for a list of Dekafix

Package Quantity

Voltage, V ~	Current, A	Cross-Section
		2,5-4 mm²
		AWG 26-10
		0,5-6 mm²

	0,2-6 mm²
	0,2-6 mm²
	0,5-2,5 mm²
	AWG 24-10
	9-10 mm
	0,5-0,8 Nm
	0,4-0,6 Nm
	IKTD 3 (0,6x3,5)

8/3
1/A4
IP 20 / PE
D-NS 6x10, DB 10/6, DG 10/6, DG 10/6T

50 pcs.

Voltage, V ~	Current, A	Cross-Section
		6 mm²
		AWG 26-8
		0,5-6 mm²

	0,2-10 mm²
	0,2-10 mm²
	0,5-4 mm²
	AWG 24-8
	10-12 mm
	0,8-1,2 Nm
	0,6 -0,8 Nm
	IKTD 4 (0,8x4)

8/3
1/B5
IP 20 / PE
D-NS 8x10, DG 10/8

25 pcs.