
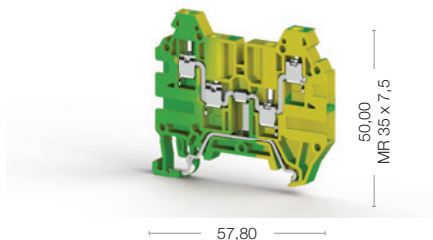


AVK RD Series Earth Terminals



AVK 2,5 CCT

Width: 5 mm



AVK 4 CCT

Width: 6 mm

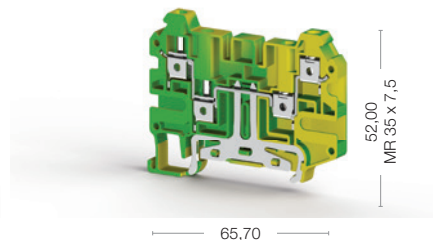

Cat No:

334 220

Cat No:

334 260



Electrical Ratings
CE (EN 60947-7-2)
UL - CuLus
VDE (IEC 60947-7-2)
CSA
ATEX

Voltage, V ~	Current, A	Cross-Section
		2,5 mm ²
		AWG 26-12
		0,5-2,5 mm ²

Voltage, V ~	Current, A	Cross-Section
		4 mm ²
		0,5-6 mm ²

Connection Data
Conductor cross section solid (min-max.)
Conductor cross section stranded (min-max.)
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, (min-max.)
AWG Conductor
Insulation Stripping Length (min.-max.)
Torque (min-max.)
Rail Tightening torque, (min-max.)
Screwdriver

	0,2-4 mm ²
	0,2-4 mm ²
	0,5-1,5 mm ²
	AWG 24-12
	9-10 mm
	0,4-0,6 Nm
	IKTD 3 (0,6x3,5)

	0,2-6 mm ²
	0,2-6 mm ²
	0,5-2,5 mm ²
	AWG 24-10
	9-10 mm
	0,5-0,8 Nm
	IKTD 3 (0,6x3,5)

End Plate - Disconnect Plate

Type	Order No	Qty.
NPP/AVK 2,5 CCT	444 132T	25

Type	Order No	Qty.
NPP/AVK 4 CCT	450 342T	25

Technical Data
Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type
Marking Tags (Dekafix)
See pages 326-333 for a list of Dekafix

8/3
1/A3
IP 20 / PE
D-NS 5x10, DB 10/5, DG 10/5, DG 10/5T

8/3
1/A4
IP 20 / PE
D-NS 6x10, DG 10/6, DG 10/6T, DB 10/6

Package Quantity

25 pcs.

50 pcs.
