


AVK 35 RDS

Width: 16 mm

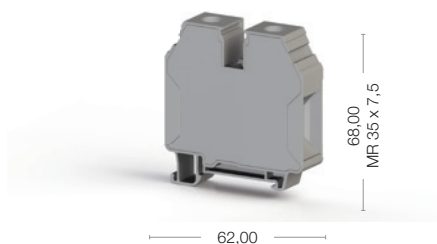

Cat No:

304 580
304 589

Voltage, V ~	Current, A	Cross-Section
1000	125	35 mm²
600	115	AWG 10-2
800	111	6-50 mm²

6-50 mm²
6-35 mm²
4-16 mm²
AWG 10-2
16-18 mm
4,0-6,0 Nm
IKTD 6 (1,2x6,5)

Type	Order No	Qty.

Type	Order No	Qty.
UK 35/2 RDS	480 212	25
UK 35/3 RDS	480 213	20
UK 35/4 RDS	480 214	15
UK 35/10 RDS	480 219	5


8/3
1/B9
IP 20 / -
D-NS 10x10, D-NS 14x10, DG 10/10, D-NS 12x10

50 pcs.

* Higher torque value compare to AVK 35 RD

AVK 35 IRDS

Width: 16 mm

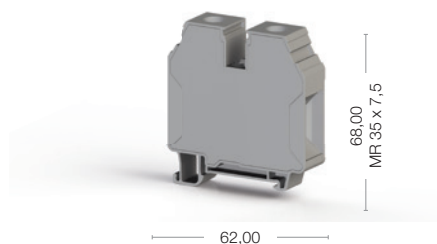

Cat No:

304 590
304 599

Voltage, V ~	Current, A	Cross-Section
1000	125	35 mm²
600	115	AWG 10-2
800	111	6-50 mm²

6-50 mm²
6-35 mm²
4-16 mm²
AWG 10-2
16-18 mm
4,0-6,0 Nm
S 5 (DIN6911)

Type	Order No	Qty.

Type	Order No	Qty.
UK 35/2 RDS	480 212	25
UK 35/3 RDS	480 213	20
UK 35/4 RDS	480 214	15
UK 35/10 RDS	480 219	5


8/3
1/B9
IP 20 / -
D-NS 10x10, D-NS 14x10, DG 10/10, D-NS 12x10

50 pcs.

* Inbus screw

AVK 35 RD

Width: 16 mm

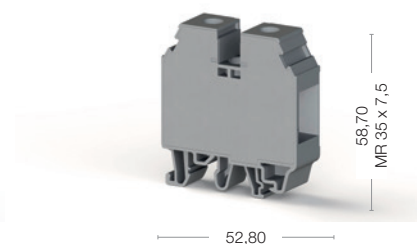

Cat No:

304 250
304 259

Voltage, V ~	Current, A	Cross-Section
1000	125	35 mm²
600	115	AWG 12-2
750	125	
600	115	AWG 12-2
630	111	1,5-35 mm²

1,5-50 mm²
1,5-50 mm²
1,5-16 mm²
AWG 16-2
16-18 mm
2,5-3,5 Nm
IKTD 6 (1,2x6,5)

Type	Order No	Qty.
APP/AVK 35 RD	462 180	10

Type	Order No	Qty.
UK 35/2	474 172	25
UK 35/3	474 173	20
UK 35/4	474 174	15
UK 35/10	474 179	5

8/3
1/B9
IP 20 / -
D-NS 10x10, D-NS 14x10, DG 10/10, D-NS 12x10

40 pcs.

Color							
Color code is the last digit of the order number							
Blue	Green	Yellow	Red	Black	White	Orange	Brown
1	2	3	4	5	6	7	8