


AVK T Series Earth Terminals


AVK 35 T RDS

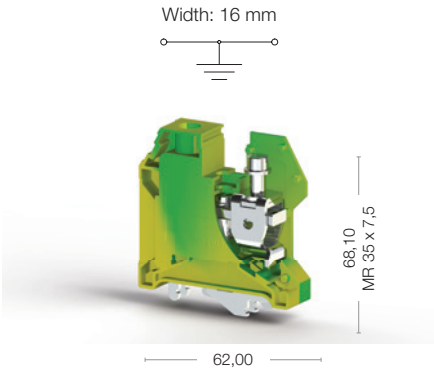

Cat No:

334 240

AVK 35 T IRDS

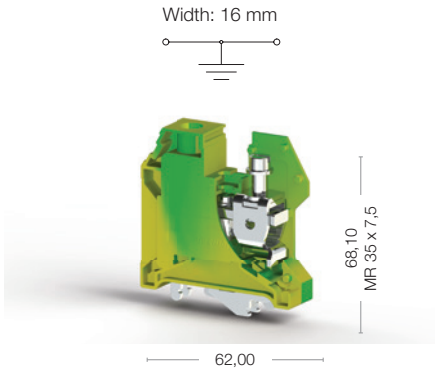

Cat No:

334 250



Electrical Ratings
CE (EN 60947-7-2)
UL - CuLus
VDE (IEC 60947-7-2)
CSA
ATEX

Connection Data
Conductor cross section solid (min-max.).
Conductor cross section stranded (min-max.)
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, (min-max.)
AWG Conductor
Insulation Stripping Length (min.-max.)
Torque (min-max.)
Rail Tightening torque, (min-max.)
Screwdriver

Technical Data
Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type
Marking Tags (Dekafix)
See pages 326-333 for a list of Dekafix

Package Quantity
25 pcs.

Voltage, V ~	Current, A	Cross-Section
		35 mm²
		AWG 10-2
		6-50 mm²

	6-50 mm²
	6-35 mm²
	4-16 mm²
	AWG 10-2
	16-18 mm
	4,0-6,0 Nm
	1,2-1,5 Nm
	IKTD 6 (1,2x6,5)

8/3
1/B9
IP 20 / PE
D-NS 10x10, D-NS 14x10, DG 10/10

25 pcs.

Voltage, V ~	Current, A	Cross-Section
		35 mm²
		AWG 10-2
		6-50 mm²

	6-50 mm²
	6-35 mm²
	4-16 mm²
	AWG 10-2
	16-18 mm
	4,0-6,0 Nm
	1,2-1,5 Nm
	S 5 (DIN6911)

8/3
1/B9
IP 20 / PE
D-NS 10x10, D-NS 14x10, DG 10/10

25 pcs.
