


Spring to Pin Series Terminals CTP: Clamp to Pin, PTP: Pin to Pin

CTP 2.5-2F


Width: 5,2 mm

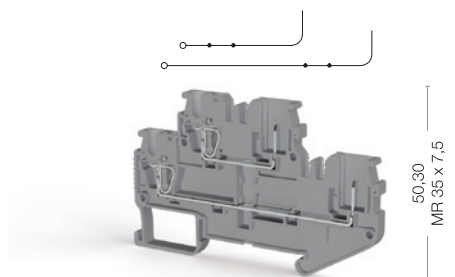

Cat No: 79,20

CTP 2.5-2FK

Width: 5,2 mm

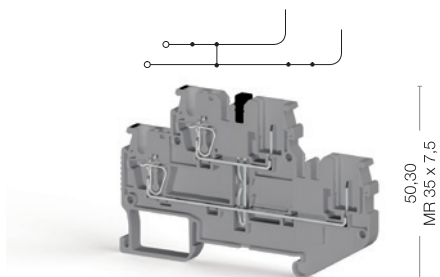

79,20

310 169
310 160
310 161

Cat No:
310 179

Electrical Ratings
IEC (EN 60947-7-1/EN 60947-7-2)
UL
VDE (IEC 60947-7-1)
CSA
ATEX

Connection Data
Conductor cross section solid (min.-max.)
Conductor cross section stranded (min.-max.)
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve
AWG Conductor
Insulation Stripping Length (min.-max.)
Screwdriver

End Plate


Partition Plate


Test Plug


Cross Connection


Technical Data
Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type
Marking Tags (Dekafix)
See pages 326-333 for a list of Dekafix

Package Quantity
50

Voltage, V ~	Current, A	Cross-Section
500	24	2,5 mm ²
300	20	AWG 28-12

0,08 - 4 mm ²
0,14 - 2,5 mm ²
0,5 mm ²
28-12
8-10 mm

Type	Order No	Qty.
NPP/CTP 2,5 F	451 079	25

Type	Order No	Qty.
APP/SRD 2,5-2F	464 069	50

Type	Order No	Qty.
TFØ2	493 020	5

Type	Order No	Qty.
CS 2,5 / 2	470 102	25
CS 2,5 / 3	470 103	20
CS 2,5 / 4	470 104	15
CS 2,5 / 5	470 105	10
CS 2,5 / 10	470 109	5
CS 2,5 / 20	470 170	10

6/3
1/A3
IP20/NA
D-NS 5,2x6, SLF-P2 W, KCSLF-W 4,9x100mm

50

Voltage, V ~	Current, A	Cross-Section
500	24	2,5 mm ²
300	20	AWG 28-12

0,08 - 4 mm ²
0,14 - 2,5 mm ²
0,5 mm ²
28-12
8-10 mm

Type	Order No	Qty.
NPP/CTP 2,5 F	451 079	25

Type	Order No	Qty.
APP/SRD 2,5-2F	464 069	50

Type	Order No	Qty.
TFØ2	493 020	5

Type	Order No	Qty.
CS 2,5 / 2	470 102	25
CS 2,5 / 3	470 103	20
CS 2,5 / 4	470 104	15
CS 2,5 / 5	470 105	10
CS 2,5 / 10	470 109	5
CS 2,5 / 20	470 170	10

6/3
1/A3
IP20/NA
D-NS 5,2x6, SLF-P2 W, KCSLF-W 4,9x100mm

50
