


Practical Spring Clamp Sensor Terminals


PYK 3 S

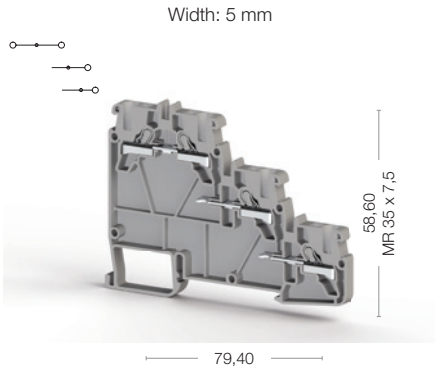

Cat No:

- 307 409
307 400

PYK 3 SLD (NPN)

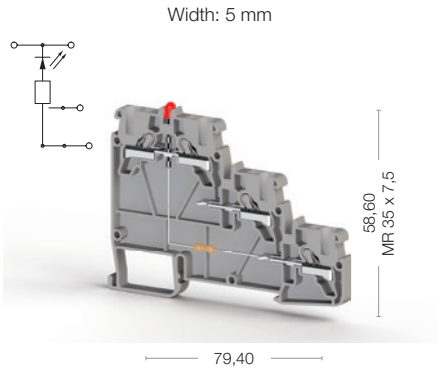

Cat No:

- 307 419
307 410



Electrical Ratings
CE (EN 60947-7-1)
UL
VDE (IEC 60947-7-1)
CSA
ATEX

Connection Data
Conductor cross section solid (min.-max.)
Conductor cross section stranded (min.-max.)
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve
AWG Conductor
Insulation Stripping Length (min.-max.)
Screwdriver

End Plate

Cross Connection

Technical Data
Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type
Marking Tags (Dekafix)
See pages 326-333 for a list of Dekafix

Package Quantity
20 pcs.

Voltage, V ~	Current, A	Cross-Section
250	24	2,5 mm ²
300	20	AWG 22-12

0,34-4 mm ²
0,34-2,5 mm ²
0,5 mm ²
AWG 22-12
9-10 mm
KTD 1 (0,4x2,5)

Type	Order No	Qty.
NPP PYK 3 S	446 609	10

Type	Order No	Qty.
UK 2,5/2	476 222	25
UK 2,5/3	476 223	20
UK 2,5/4	476 224	15
UK 2,5/10	476 229	5
UK 2,5/16	474 260	10
UK 2,5/20	474 200	10

8/3
1/A3
IP 20 / -
D-NS 5x10, SLF-P2 W, DB 10/5, DG 10/5, DG 10/5T, KC SLF-W 4,9x100mm

20 pcs.

Voltage, V ~	Current, A	Cross-Section
24	24	2,5 mm ²

0,34-4 mm ²
0,34-2,5 mm ²
0,5 mm ²
AWG 22-12
9-10 mm
KTD 1 (0,4x2,5)

Type	Order No	Qty.
NPP PYK 3 S	446 609	10

Type	Order No	Qty.
UK 2,5/2	476 222	25
UK 2,5/3	476 223	20
UK 2,5/4	476 224	15
UK 2,5/10	476 229	5
UK 2,5/16	474 260	10
UK 2,5/20	474 200	10

8/3
1/A3
IP 20 / -
D-NS 5x10, SLF-P2 W, DB 10/5, DG 10/5, DG 10/5T, KC SLF-W 4,9x100mm

20 pcs.
