


# Practical Spring Clamp Fuse and Disconnect Terminals


## PYK 4 S

Width: 8 mm

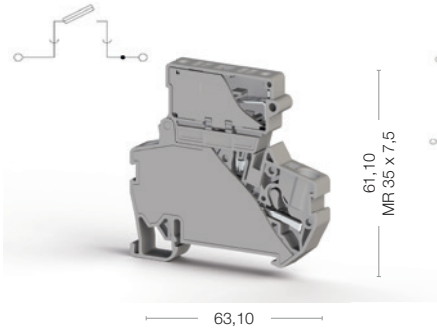

## PYK 4 SLD

Width: 8 mm

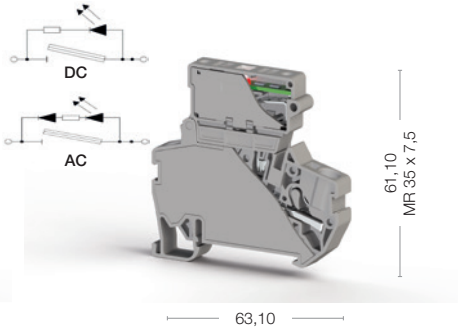

Cat No:

307 249  
307 240

Cat No:

307 259  
307 250



| Electrical Ratings  |
|---------------------|
| CE (EN 60947-7-3)   |
| UL                  |
| VDE (IEC 60947-7-3) |
| CSA                 |
| ATEX                |

| Connection Data                                                                   |
|-----------------------------------------------------------------------------------|
| Conductor cross section solid (min.-max.)                                         |
| Conductor cross section stranded (min.-max.)                                      |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve |
| AWG Conductor                                                                     |
| Insulation Stripping Length (min.-max.)                                           |
| Screwdriver                                                                       |

| Ordering Data |
|---------------|
| Grey          |
| Beige         |
| Grey          |
| Beige         |

| Voltage, V ~ | Current, A | Cross-Section     |
|--------------|------------|-------------------|
| 500          | 10         | 4 mm <sup>2</sup> |
| 300          | 10         | AWG 22-10         |
|              |            |                   |
|              |            |                   |

|                        |
|------------------------|
| 0,34-6 mm <sup>2</sup> |
| 0,25-4 mm <sup>2</sup> |
| 1 mm <sup>2</sup>      |
| AWG 22-10              |
| 9-10 mm                |
| KTD 2 (0,5x3,0)        |

| Type           | Order No | Qty. |
|----------------|----------|------|
| PYK 4 S (5x20) | 307 249  | 15   |
| PYK 4 S (5x20) | 307 240  | 15   |
| PYK 4 S (5x25) | 307 289  | 15   |
| PYK 4 S (5x25) | 307 280  | 15   |
|                |          |      |
|                |          |      |

| Voltage, V ~ | Current, A | Cross-Section     |
|--------------|------------|-------------------|
|              | 10         | 4 mm <sup>2</sup> |
|              | 10         | AWG 22-10         |
|              |            |                   |
|              |            |                   |

|                        |
|------------------------|
| 0,34-6 mm <sup>2</sup> |
| 0,25-4 mm <sup>2</sup> |
| 1 mm <sup>2</sup>      |
| AWG 22-10              |
| 9-10 mm                |
| KTD 2 (0,5x3,0)        |

| Type             | Order No          | Qty. |
|------------------|-------------------|------|
| PYK 4 SLD (5x20) | 307 259 (24V DC)  | 15   |
| PYK 4 SLD (5x20) | 307 269 (220V AC) | 15   |
| PYK 4 SLD (5x25) | 307 299 (24V DC)  | 15   |
| PYK 4 SLD (5x25) | 307 309 (220V AC) | 15   |
|                  |                   |      |
|                  |                   |      |



| Technical Data                                                      |
|---------------------------------------------------------------------|
| Rated Impulse Voltage / Pollution severity                          |
| Insulation material group / Gauge pin code according to IEC 60947-1 |
| Protection class / Protection conductor type                        |
| Fuse / Fuse Type                                                    |
| Marking Tags (Dekafix)                                              |
| See pages 326-333 for a list of Dekafix                             |

| Package Quantity |
|------------------|
| 15 pcs.          |

| Type    | Order No | Qty. |
|---------|----------|------|
| UK 6/2  | 476 242  | 25   |
| UK 6/3  | 476 243  | 20   |
| UK 6/4  | 476 244  | 15   |
| UK 6/10 | 476 249  | 5    |

|                                                       |
|-------------------------------------------------------|
| 6/3                                                   |
| 1/A4                                                  |
| IP 20 / -                                             |
| G/5x20-5x25                                           |
| D-NS 8x10, SLF-P2 W, DB 5, DG 10/8, KCSLF-W 4,9x100mm |

|         |
|---------|
| 15 pcs. |
|---------|

| Type    | Order No | Qty. |
|---------|----------|------|
| UK 6/2  | 476 242  | 25   |
| UK 6/3  | 476 243  | 20   |
| UK 6/4  | 476 244  | 15   |
| UK 6/10 | 476 249  | 5    |

|                                                       |
|-------------------------------------------------------|
| 6/3                                                   |
| 1/A4                                                  |
| IP 20 / -                                             |
| G/5x20-5x25                                           |
| D-NS 8x10, SLF-P2 W, DB 5, DG 10/8, KCSLF-W 4,9x100mm |

|         |
|---------|
| 15 pcs. |
|---------|