

PYK Series

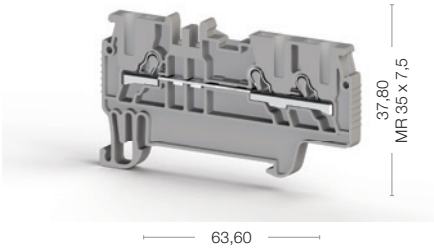
One Input - Two Output

Two Input - Two Output

Terminals


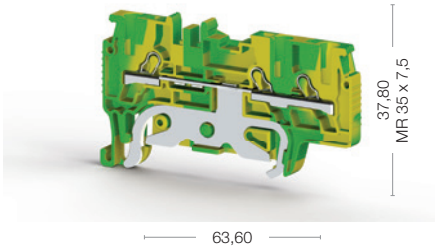
PYK 1,5 ME

Width: 4,2 mm

PYK 1,5 MET

Width: 4,2 mm

Electrical Ratings
CE (EN 60947-7-1 - EN 60947-7-2)
UL
VDE (IEC 60947-7-1)
CSA
ATEX

Connection Data
Conductor cross section solid (min.-max.)
Conductor cross section stranded (min.-max.)
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve
AWG Conductor
Insulation Stripping Length (min.-max.)
Screwdriver

End Plate



Push-in Cross Connection



Technical Data
Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type
Marking Tags (Dekafix)
See pages 326-333 for a list of Dekafix

Package Quantity
70 pcs.

Cat No:

307 039
307 030

Voltage, V ~	Current, A	Cross-Section
800	17,5	1,5 mm²
500	15	0,5-2,5 mm²

0,34-2,5 mm²
0,34-1,5 mm²
0,5 mm²
AWG 22-14
9-10 mm
KTD 1 (0,4x2,5)

Type	Order No	Qty.
NPP/PYK 1,5 ME	446 649	100

Type	Order No	Qty.
UK 1,5/2	476 602	25
UK 1,5/3	476 603	20
UK 1,5/4	476 604	15
UK 1,5/10	476 609	5

8/3
1/A1-B1
IP 20 / -
D-NS 4,2x6, DB 6/4

70 pcs.

Cat No:

336 460

Voltage, V ~	Current, A	Cross-Section
		1,5 mm²
		0,5-2,5 mm²

0,34-2,5 mm²
0,34-1,5 mm²
0,5 mm²
AWG 22-14
9-10 mm
KTD 1 (0,4x2,5)

Type	Order No	Qty.
NPP/PYK 1,5 MET	446 642T	100

Type	Order No	Qty.

8/3
1/A1-B1
IP 20 / -
D-NS 4,2x6, DB 6/4

70 pcs.
