

PYK Series

One Input - Two Output

Two Input - Two Output

Terminals

PYK 2,5 E

Width: 5 mm





Cat No:

- 307 439
- 307 430

PYK 2,5 ET

Width: 5 mm

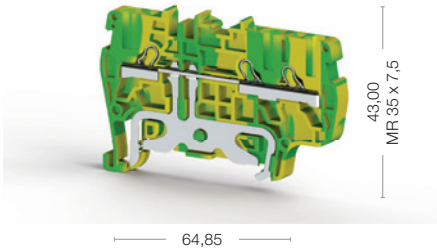

Cat No:

- 336 550



Electrical Ratings
CE (EN 60947-7-1 - EN 60947-7-2)
UL
VDE (IEC 60947-7-1)
CSA
ATEX

Connection Data
Conductor cross section solid (min.-max.)
Conductor cross section stranded (min.-max.)
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve
AWG Conductor
Insulation Stripping Length (min.-max.)
Screwdriver

End Plate

Test Terminal Block

Push-in Cross Connection

Technical Data
Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type
Marking Tags (Dekafix)
See pages 326-333 for a list of Dekafix

Package Quantity
50 pcs.

Color
Color code is the last digit of the order number
Blue Green Yellow Red Black White Orange Brown
1 2 3 4 5 6 7 8

Voltage, V ~	Current, A	Cross-Section
800	24	2,5 mm²
600	20	AWG 22-12
630	21	0,5-4 mm²

0,34-4 mm²
0,34-2,5 mm²
0,5 mm²
AWG 22-12
9-10 mm
KTD 1 (0,4x2,5)

Type	Order No	Qty.
NPP/PYK 2,5 E	446 619	10

Type	Order No	Qty.
PYK TEST	498 559	25

Type	Order No	Qty.
UK 2,5/2	476 222	25
UK 2,5/3	476 223	20
UK 2,5/4	476 224	15
UK 2,5/10	476 229	5
UK 2,5/16	474 260	10
UK 2,5/20	474 200	10

8/3
1/A3
IP 20 / -
D-NS 5x10, SLF-P2 W, DB 10/5, DG 10/5, DG 10/5T, SLF-P1 W, KCSLF-W 11,2x100mm, KCSLF-W 4,9x100mm

50 pcs.

Voltage, V ~	Current, A	Cross-Section
		2,5 mm²
		AWG 22-12
		0,5-4 mm²

0,34-4 mm²
0,34-2,5 mm²
0,5 mm²
AWG 22-12
9-10 mm
KTD 1 (0,4x2,5)

Type	Order No	Qty.
NPP/PYK 2,5 ET	446 612T	10

Type	Order No	Qty.

8/3
1/A3
IP 20 / -
D-NS 5x10, SLF-P2 W, DB 10/5, DG 10/5, DG 10/5T, SLF-P1 W, KCSLF-W 11,2x100mm, KCSLF-W 4,9x100mm

50 pcs.
