

PYK Series

One input - Two Output



Two input - Two Output

Spring Clamp

Terminals

PYK 4 ET

Width: 6 mm

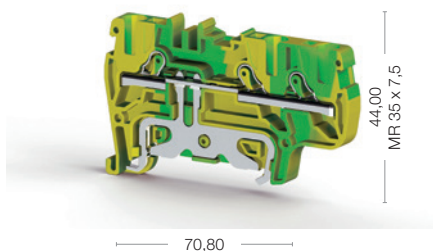

Cat No:

336 600

PYK 4 C

Width: 6 mm



Cat No:

307 669

307 660



Electrical Ratings
CE (EN 60947-7-1 - EN 60947-7-2)
UL
VDE (IEC 60947-7-1)
CSA
ATEX

Voltage, V ~	Current, A	Cross-Section
		4 mm²
		AWG 22-10
		0,5-4 mm²

Voltage, V ~	Current, A	Cross-Section
1000	32	4 mm²
600	30	AWG 22-10

Connection Data
Conductor cross section solid (min.-max.)
Conductor cross section stranded (min.-max.)
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve
AWG Conductor
Insulation Stripping Length (min.-max.)
Screwdriver

	0,34-6 mm²
	0,25-4 mm²
	1 mm²
	AWG 22-10
	9-10 mm
	KTD 2 (0,5x3,0)

	0,34-6 mm²
	0,25-4 mm²
	1 mm²
	AWG 22-10
	9-10 mm
	KTD 2 (0,5x3,0)



Type	Order No	Qty.
NPP/PYK 4 ET	446 552T	50

Type	Order No	Qty.
NPP/PYK 4C	446 679	25



Type	Order No	Qty.
PYK TEST	498 559	25
PYK TEST A	498 659	25

Type	Order No	Qty.
PYK TEST	498 559	25
PYK TEST A	498 659	25



Type	Order No	Qty.
UK 4/2	476 232	25
UK 4/3	476 233	20
UK 4/4	476 234	15
UK 4/10	476 239	5

Type	Order No	Qty.
UK 4/2	476 232	25
UK 4/3	476 233	20
UK 4/4	476 234	15
UK 4/10	476 239	5

Technical Data
Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type
Marking Tags (Dekafix)
See pages 326-333 for a list of Dekafix

8/3
1/A4
IP 20 / -
D-NS 6x10, DB 10/6, DG 10/6, DG 10/6T, SLF-P1 W, KCSLF-W 11,2x100mm

8/3
1/A4
IP 20 / -
D-NS 6x10, DB 10/6, DG 10/6, DG 10/6T, SLF-P1 W, KCSLF-W 11,2x100mm

Package Quantity
50 pcs.

50 pcs.

Package Quantity
45 pcs.

Color							
Color code is the last digit of the order number							
Blue	Green	Yellow	Red	Black	White	Orange	Brown
1	2	3	4	5	6	7	8