

PYK Series

One input - Two Output


Two input - Two Output

Spring Clamp

Terminals

PYK 6 E

Width: 8 mm


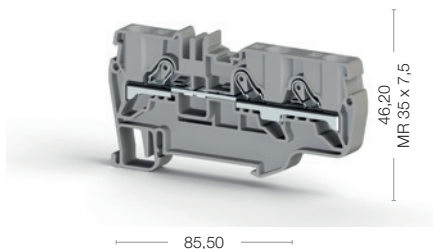


Cat No:

307 639
307 630

PYK 6 ET

Width: 8 mm

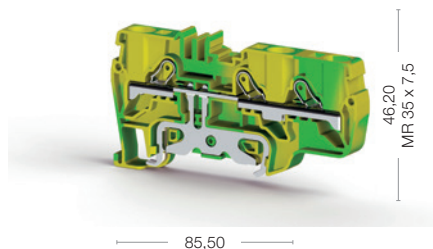

Cat No:

336 620



Electrical Ratings
CE (EN 60947-7-1 - EN 60947-7-2)
UL
VDE (IEC 60947-7-1)
CSA
ATEX

Voltage, V ~	Current, A	Cross-Section
1000	41	6 mm ²
600	48	AWG 20-8

Voltage, V ~	Current, A	Cross-Section
		6 mm ²
		AWG 20-8

Connection Data
Conductor cross section solid (min.-max.)
Conductor cross section stranded (min.-max.)
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve
AWG Conductor
Insulation Stripping Length (min.-max.)
Screwdriver

0,5-10 mm ²
0,5-6 mm ²
1,5 mm ²
AWG 20-8
11-13 mm
KTD 3 (0,6x3,5)

0,5-10 mm ²
0,5-6 mm ²
1,5 mm ²
AWG 20-8
11-13 mm
KTD 3 (0,6x3,5)

End Plate

Type	Order No	Qty.
NPP/PYK 6 E	446 689	25

Type	Order No	Qty.
NPP/PYK 6 ET	446 682T	25

Test Terminal Block

Type	Order No	Qty.
PYK TEST	498 559	25

Push-in Cross Connection

Type	Order No	Qty.
UK 6/2	476 242	25
UK 6/3	476 243	10
UK 6/4	476 244	15
UK 6/9	476 249	5

Technical Data
Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type
Marking Tags (Dekafix)
See pages 326-333 for a list of Dekafix

8/3
1/A5
IP 20 / -
D-NS 8x10, DG 10/8, DG 10/8T, SLF-P1 W, KCSLF-W 11,2x100mm

8/3
1/A5
IP 20 / -
D-NS 8x10, DG 10/8, DG 10/8T, SLF-P1 W, KCSLF-W 11,2x100mm

Package Quantity

45 pcs.

45 pcs.

Color							
Color code is the last digit of the order number							
Blue	Green	Yellow	Red	Black	White	Orange	Brown
1	2	3	4	5	6	7	8