


Practical Spring Clamp Terminals

PYK 1,5

Width: 4,2 mm



43,00
MR 35 x 7,5


53,30

Cat No:

307 009
307 000

PYK 1,5 M

Width: 4,2 mm

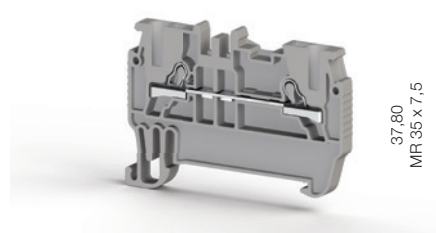

37,80
MR 35 x 7,5

52,00

Cat No:

307 019
307 010



Electrical Ratings
CE (EN 60947-7-1)
UL
VDE (IEC 60947-7-1)
CSA
ATEX

Voltage, V ~	Current, A	Cross-Section
800	17,5	1,5 mm ²
600	15	22-14 mm ²
630	15	0,5-2,5 mm ²

Connection Data
Conductor cross section solid (min.-max.)
Conductor cross section stranded (min.-max.)
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve
AWG Conductor
Insulation Stripping Length (min.-max.)
Screwdriver

0,34-2,5 mm ²
0,34-1,5 mm ²
0,5 mm ²
AWG 22-14
9-10 mm
KTD 1 (0,4x2,5)

Voltage, V ~	Current, A	Cross-Section
800	17,5	1,5 mm ²
500	15	0,5-2,5 mm ²

0,34-2,5 mm ²
0,34-1,5 mm ²
0,5 mm ²
AWG 22-14
9-10 mm
KTD 1 (0,4x2,5)



Type	Order No	Qty.
NPP/PYK 1,5	446 449	100

Type	Order No	Qty.
NPP/PYK 1,5 M	446 639	100



Type	Order No	Qty.
APP PYK 1,5 M	463 180	25

Type	Order No	Qty.
APP PYK 1,5 M	463 180	25



Type	Order No	Qty.
UK 1,5/2	476 602	25
UK 1,5/3	476 603	20
UK 1,5/4	476 604	15
UK 1,5/10	476 609	5

Type	Order No	Qty.
UK 1,5/2	476 602	25
UK 1,5/3	476 603	20
UK 1,5/4	476 604	15
UK 1,5/10	476 609	5

Technical Data
Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type
Marking Tags (Dekafix)
See pages 326-333 for a list of Dekafix

8/3
1/A1-B1
IP 20 / -
SLF-P1 W, DB 10/4, SLF-P2 W, D-NS 4,2x6, KCSLF-W 4,9 x 100mm

8/3
1/A1-B1
IP 20 / -
SLF-P1 W, DB 10/4, SLF-P2 W, D-NS 4,2x6, KCSLF-W 4,9 x 100mm

Package Quantity

80 pcs.

100 pcs.

Color							
Color code is the last digit of the order number							
Blue	Green	Yellow	Red	Black	White	Orange	Brown
1	2	3	4	5	6	7	8