


Practical Spring Clamp Terminals

PYK 10

Width: 10 mm

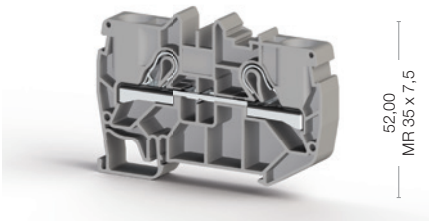


75,40

Cat No:

307 139
307 130

PYK 16

Width: 12 mm

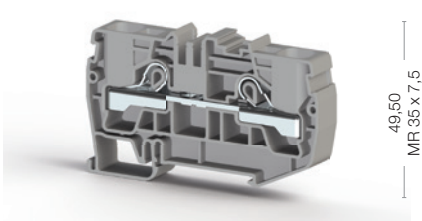

81,45

Cat No:

307 659
307 650



Electrical Ratings
CE (EN 60947-7-1)
UL
VDE (IEC 60947-7-1)
CSA
ATEX

Connection Data
Conductor cross section solid (min.-max.)
Conductor cross section stranded (min.-max.)
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve
AWG Conductor
Insulation Stripping Length (min.-max.)
Screwdriver

End Plate

Partition Plate

Push-in Cross Connection

Technical Data
Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type
Marking Tags (Dekafix)
See pages 326-333 for a list of Dekafix

Package Quantity

Voltage, V ~	Current, A	Cross-Section
800	57	10 mm ²
600	55	AWG 20-6
800	50	0,5-10 mm ²

	0,5-16 mm ²
	0,5-10 mm ²
	4 mm ²
	AWG 20-6
	13-15 mm
	KTD 4 (0,8x4,0)

Type	Order No	Qty.
NPP/PYK 10	446 479	50

Type	Order No	Qty.
APP PYK 10	463 200	25

Type	Order No	Qty.
UK 10/2	476 252	25
UK 10/3	476 253	20
UK 10/4	476 254	15
UK 10/10	476 259	5

8/3
1/B6
IP 20 / -
D-NS 10x10, SLF-P2 W, DG 10/10, SLF-P1 W, KCSLF-W 4,9x100mm, KCSLF-W 11,2x100mm

50 pcs.

Voltage, V ~	Current, A	Cross-Section
1000	76	16 mm ²
600	80	AWG 20-4

	0,5-25 mm ²
	0,5-16 mm ²
	4 mm ²
	AWG 20-4
	16-18 mm
	KTD 4 (0,8x4,0)

Type	Order No	Qty.
NPP/PYK 16	450 419	25

Type	Order No	Qty.

Type	Order No	Qty.
UK 16/2	470 142	25
UK 16/3	470 143	20
UK 16/4	470 144	15
UK 16/5	470 145	10

8/3
1/B7
IP 20 / -
D-NS 12x10, DG 10/10, SLF-P1 W, SLF-P2 W, KCSLF-W 4,9x100mm, KCSLF-W 11,2x100mm

30 pcs.

Color							
Color code is the last digit of the order number							
Blue	Green	Yellow	Red	Black	White	Orange	Brown
1	2	3	4	5	6	7	8