


Practical Spring Clamp Earth Terminals


PYK 1,5 MT

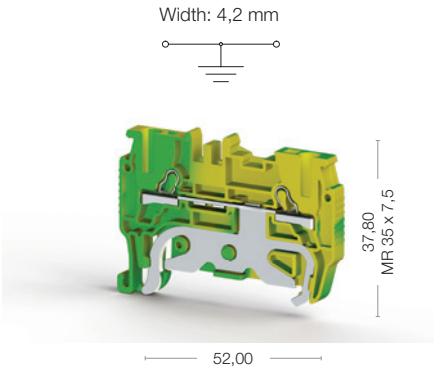

Cat No:

336 440

PYK 1,5 T

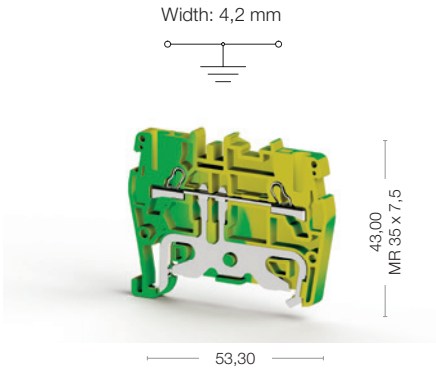

Cat No:

336 490



Electrical Ratings
CE (EN 60947-7-2)
UL
VDE (IEC 60947-7-2)
CSA
ATEX

Connection Data
Conductor cross section solid (min.-max.)
Conductor cross section stranded (min.-max.)
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve
AWG Conductor
Insulation Stripping Length (min.-max.)
Screwdriver

End Plate

Technical Data
Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type
Marking Tags (Dekafix)
See pages 326-333 for a list of Dekafix

Package Quantity

Voltage, V ~	Current, A	Cross-Section
		1,5 mm²
		0,5-2,5 mm²

	0,34-2,5 mm²
	0,34-1,5 mm²
	0,5 mm²
	AWG 22-14
	9-10 mm
	KTD 1 (0,4x2,5)

Type	Order No	Qty.
NPP/PYK 1,5 MT	446 632 T	100

8/3
1/A1-B1
IP 20 / PE
D-NS 4,2x6, DB 6/4, SLF-P1 W, SLF-P2 W, KCSLF-W 4,9x100mm, KCSLF-W 11,2x100mm

100 pcs.

Voltage, V ~	Current, A	Cross-Section
		1,5 mm²
		0,5-2,5 mm²

	0,34-2,5 mm²
	0,34-1,5 mm²
	0,5 mm²
	AWG 22-14
	9-10 mm
	KTD 1 (0,4x2,5)

Type	Order No	Qty.
NPP/PYK 1,5 T	446 442 T	10

8/3
1/A1-B1
IP 20 / PE
D-NS 4,2x6, DB 6/4, SLF-P1 W, SLF-P2 W, KCSLF-W 4,9x100mm, KCSLF-W 11,2x100mm

100 pcs.
