
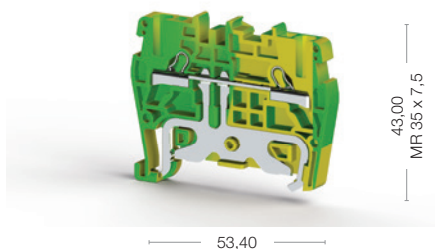



PYK 2,5 T

Width: 5 mm



PYK 4 T

Width: 6 mm



Cat No:

336 500

Voltage, V ~	Current, A	Cross-Section
		2,5 mm ²
		AWG 22-12
		2,5 mm ²
		0,5-2,5 mm ²

0,34-4 mm ²
0,34-2,5 mm ²
0,5 mm ²
AWG 22-12
9-10 mm
KTD 1 (0,4x2,5)

Type	Order No	Qty.
NPP/PYK 2,5 T	446 442 T	10

8/3
1/A3
IP 20 / PE
D-NS 5x10, SLF-P2 W, DB 10/5, DG 10/5, DG 10/5T, SLF-P1 W, KCSLF-W 4,9x100mm, KCSLF-W 11,2x100mm

50 pcs.

Cat No:

336 510

Voltage, V ~	Current, A	Cross-Section
		4 mm ²
		AWG 22-10
		4 mm ²
		0,5-2,5 mm ²

0,34-6 mm ²
0,25-4 mm ²
1 mm ²
AWG 22-10
9-10 mm
KTD 2 (0,5x3,0)

Type	Order No	Qty.
NPP/PYK 4 T	446 452 T	10

8/3
1/A4
IP 20 / PE
D-NS 6x10, SLF-P2 W, DB 10/5, DG 10/5, DG 10/5T, SLF-P1 W, KCSLF-W 4,9x100mm, KCSLF-W 11,2x100mm

50 pcs.
