
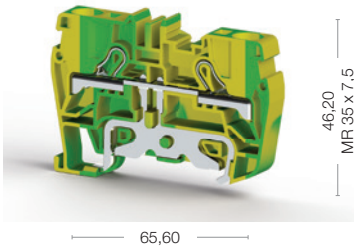


Practical Spring Clamp Earth Terminals



PYK 6 T

Width: 8 mm



PYK 10 T

Width: 10 mm

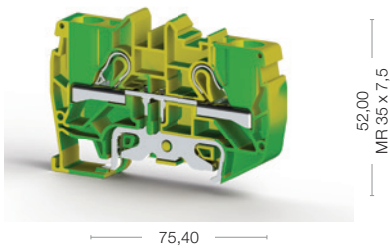

Electrical Ratings
CE (EN 60947-7-2)
UL
VDE (IEC 60947-7-2)
CSA
ATEX

Connection Data
Conductor cross section solid (min.-max.)
Conductor cross section stranded (min.-max.)
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve
AWG Conductor
Insulation Stripping Length (min.-max.)
Screwdriver

End Plate
 

Technical Data
Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type
Marking Tags (Dekafix)
See pages 326-333 for a list of Dekafix

Package Quantity
60 pcs.

Cat No:

336 520

Voltage, V ~	Current, A	Cross-Section
600		6 mm²
		AWG 20-8
		0,5-6 mm²

0,5-10 mm²
0,5-6 mm²
1,5 mm²
AWG 20-8
11-13 mm
KTD 3 (0,6x3,5)

Type	Order No	Qty.
NPP/PYK 6 T	446 462 T	10

8/3
1/A5
IP 20 / PE
D-NS 8x10, SLF-P2 W, DG 10/8, SLF-P1 W, KCSLF-W 4,9x100mm, KCSLF-W 11,2x100mm

60 pcs.

Cat No:

336 530

Voltage, V ~	Current, A	Cross-Section
600		10 mm²
		AWG 20-6
		0,5-10 mm²

0,5-16 mm²
0,5-10 mm²
4 mm²
AWG 20-6
13-15 mm
KTD 4 (0,8x4,0)

Type	Order No	Qty.
NPP/PYK 10 T	446 472 T	10

8/3
1/B6
IP 20 / PE
D-NS 10x10, SLF-P2 W, DG 10/10, SLF-P1 W, KCSLF-W 4,9x100mm, KCSLF-W 11,2x100mm

25 pcs.
