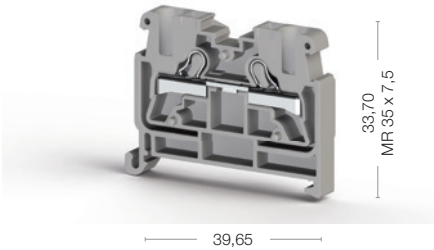


PYKMR Series Mini Terminals

PYKMR 2,5

Width: 5 mm

Cat No:

- 307 499
- 307 490



Electrical Ratings
CE (EN 60947-7-1 / EN 60947-7-2)
UL
VDE (IEC 60947-7-1)
CSA
ATEX

Connection Data
Conductor cross section solid (min.-max.)
Conductor cross section stranded (min.-max.)
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve
AWG Conductor
Insulation Stripping Length (min.-max.)
Screwdriver

End Plate

Grey
Grey
Yellow- Green
Yellow- Green

Technical Data
Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type
Marking Tags (Dekafix)
See pages 326-333 for a list of Dekafix

Package Quantity
50 pcs.

Voltage, V ~	Current, A	Cross-Section
800	24	2,5 mm²
630	21	0,5-4 mm²

0,34-4 mm²
0,34-2,5 mm²
0,5 mm²
AWG 22-12
9-10 mm
KTD 1 (0,4x2,5)


Type	Order No	Qty.
NPP1 R 2,5	446 589	100
NPP2 PYKMR 2,5	446 599	100

8/3
1/A3
IP 20 / -
D-NS 5x6, DB 5, DB 10/5, DG 6/5, DG 10/5T, SLF-P1 W, SLF-P2 W, KCSLF-W 4,9x100mm, KCSLF-W 11,2x100mm

50 pcs.

PYKM 2,5

Width: 5 mm

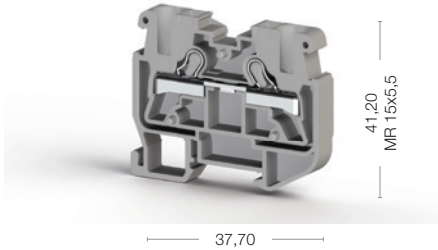Cat No:

- 307 399
- 307 390

Voltage, V ~	Current, A	Cross-Section
800	24	2,5 mm²
600	20	AWG 22-12
690	21	0,5-4 mm²

0,34-4 mm²
0,34-2,5 mm²
0,5 mm²
AWG 22-12
9-10 mm
KTD 1 (0,4x2,5)

Type	Order No	Qty.
NPP1 PYKM 2,5	446 589	100
NPP2 PYKM 2,5	446 599	100

8/3
1/A3
IP 20 / -
D-NS 5x6, DB 5, DB 10/5, DG 6/5, DG 10/5T, SLF-P1 W, SLF-P2 W, KCSLF-W 4,9x100mm, KCSLF-W 11,2x100mm

50 pcs.
