


Double - Deck Practical Spring Clamp Terminals


PYK 2,5 - 2 FLD

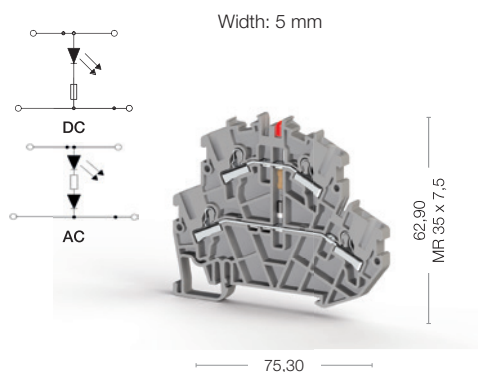

Cat No:

307 349
307 340

PYK 2,5 - 2 FD A

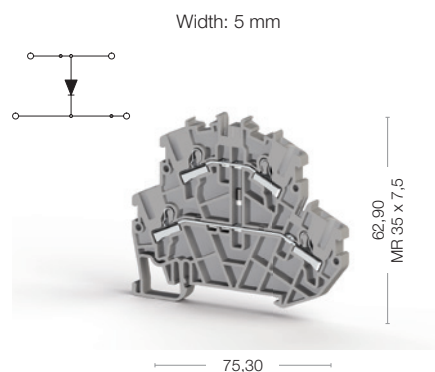

Cat No:

307 369
307 360



Electrical Ratings
CE (EN 60947-7-1)
UL
VDE (IEC 60947-7-1)
CSA
ATEX

Voltage, V ~	Current, A	Cross-Section
	24	2,5 mm ²

Voltage, V ~	Current, A	Cross-Section
500	1	2,5 mm ²

Connection Data
Conductor cross section solid (min.-max.)
Conductor cross section stranded (min.-max.)
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve
AWG Conductor
Insulation Stripping Length (min.-max.)
Screwdriver

0,34-4 mm ²
0,34-2,5 mm ²
0,5 mm ²
AWG 22-12
9-10 mm
KTD 1 (0,4x2,5)

0,34-4 mm ²
0,34-2,5 mm ²
0,5 mm ²
AWG 22-12
9-10 mm
KTD 1 (0,4x2,5)

Ordering Data

Type	Order No	Qty.
24V DC	307 349	40
220V AC	307 359	40

Type	Order No	Qty.

Technical Data For Diode
Diode Voltage
Diode Current
Diod

1000 V
1 A
1 N 4007

End Plate

Type	Order No	Qty.
NPP PYK 2,5-2 FLD	446 519	10

Type	Order No	Qty.
NPP PYK 2,5-2 F	446 519	10

Cross Connection

Type	Order No	Qty.
UK 2,5/2	476 222	25
UK 2,5/3	476 223	20
UK 2,5/4	476 224	15
UK 2,5/10	476 229	5
UK 2,5/16	474 260	10
UK 2,5/20	474 200	10

Type	Order No	Qty.
UK 2,5/2	476 222	25
UK 2,5/3	476 223	20
UK 2,5/4	476 224	15
UK 2,5/10	476 229	5
UK 2,5/16	474 260	10
UK 2,5/20	474 200	10

Technical Data
Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type

6/3
1/A3
IP 20 / -

6/3
1/A3
IP 20 / -

Marking Tags (Dekafix)
See pages 326-333 for a list of Dekafix

D-NS 5x10, DB 10/5, DG 10/5, DG 10/5T, SLF-P1 W, KCSLF-W 11,2x100mm

D-NS 5x10, DB 10/5, DG 10/5, DG 10/5T, SLF-P1 W, KCSLF-W 11,2x100mm

Package Quantity

40 pcs.

40 pcs.
