


Multilevel Practical Spring Clamp Terminals

PYK 2,5 - 3 F

Width: 5 mm

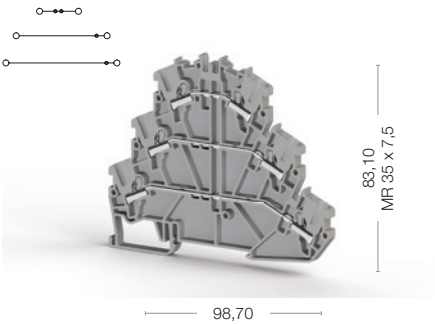


Cat No:

- 307 199
- 307 190

PYK 2,5 - 3 FK

Width: 5 mm

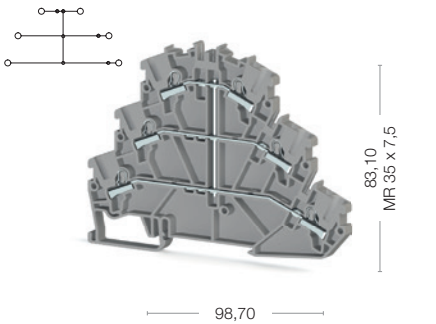

Cat No:

- 307 559
- 307 550



Electrical Ratings
CE (EN 60947-7-1 / EN 60947-7-2)
UL
VDE (IEC 60947-7-1)
CSA
ATEX

Connection Data
Conductor cross section solid (min.-max.)
Conductor cross section stranded (min.-max.)
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve
AWG Conductor
Insulation Stripping Length (min.-max.)
Screwdriver

End Plate

Cross Connection

Technical Data
Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type
Marking Tags (Dekafix)
See pages 326-333 for a list of Dekafix

Package Quantity

Voltage, V ~	Current, A	Cross-Section
500	24	2,5 mm²
300	20	AWG 22-12
500	18	0,5-2,5 mm²

	0,34-4 mm²
	0,34-2,5 mm²
	0,5 mm²
	AWG 22-12
	9-10 mm
	KTD 1 (0,4x2,5)

Type	Order No	Qty.
NPP PYK 2,5-3 F	446 529	10

Type	Order No	Qty.
UK 2,5/2	476 222	25
UK 2,5/3	476 223	20
UK 2,5/4	476 224	15
UK 2,5/10	476 229	5
UK 2,5/16	474 260	10
UK 2,5/20	474 200	10

6/3
1/A3
IP 20 / -
D-NS 5x10, SLF-P2 W, DB 10/5, DG 10/5, DG 10/5T, SLF-P1 W, KCSLF-W 11,2x100mm

30 pcs.

Voltage, V ~	Current, A	Cross-Section
500	24	2,5 mm²

	0,34-4 mm²
	0,34-2,5 mm²
	0,5 mm²
	AWG 22-12
	9-10 mm
	KTD 1 (0,4x2,5)

Type	Order No	Qty.
NPP PYK 2,5-3 FK	446 529	10

Type	Order No	Qty.
UK 2,5/2	476 222	25
UK 2,5/3	476 223	20
UK 2,5/4	476 224	15
UK 2,5/10	476 229	5
UK 2,5/16	474 260	10
UK 2,5/20	474 200	10

6/3
1/A3
IP 20 / -
D-NS 5x10, SLF-P2 W, DB 10/5, DG 10/5, DG 10/5T, SLF-P1 W, KCSLF-W 11,2x100mm

30 pcs.