



SRD 1,5

SRD 1,5 C

SRD 1,5 CT

Width: 4,2 mm

Width: 4,2 mm

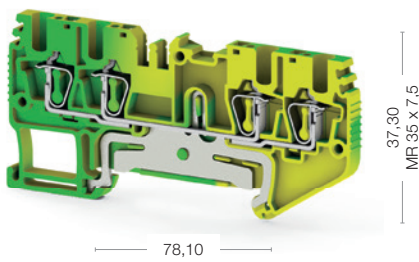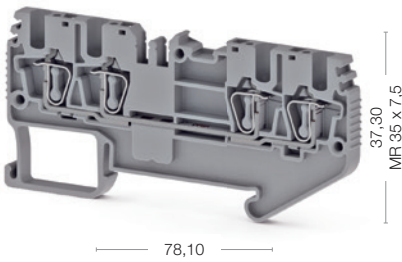

| Electrical Ratings              |
|---------------------------------|
| IEC (EN 60947-7-1/EN 60947-7-2) |
| UL                              |
| VDE (IEC 60947-7-1)             |
| CSA                             |
| ATEX                            |

| Connection Data                                                                   |
|-----------------------------------------------------------------------------------|
| Conductor cross section solid (min.-max.)                                         |
| Conductor cross section stranded (min.-max.)                                      |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve |
| AWG Conductor                                                                     |
| Insulation Stripping Length (min.-max.)                                           |
| Screwdriver                                                                       |

| Technical Data For Diode |
|--------------------------|
| Diode Reverse Voltage    |
| Diode Current            |
| Diod                     |
|                          |
|                          |

| End Plate |
|-----------|
|           |

| Partition Plate |
|-----------------|
|                 |

| Test Plug |
|-----------|
|           |

| Cross Connection |
|------------------|
|                  |

| Technical Data                                                      |
|---------------------------------------------------------------------|
| Rated Impulse Voltage / Pollution severity                          |
| Insulation material group / Gauge pin code according to IEC 60947-1 |
| Protection class / Protection conductor type                        |
| Marking Tags (Dekafix)                                              |
| See pages 326-333 for a list of Dekafix                             |

| Package Quantity |
|------------------|
|                  |

Cat No:

311 029  
311 020

| Voltage, V ~ | Current, A | Cross-Section  |
|--------------|------------|----------------|
| 800          | 17,5       | 0,08 - 1,5 mm² |
|              |            |                |
|              |            |                |
|              |            |                |

|  |                |
|--|----------------|
|  | 0,08 - 1,5 mm² |
|  | 0,08 - 1,5 mm² |
|  | 0,5 mm²        |
|  | 28-16          |
|  | 8-10           |
|  | KT1 (0,4x2,5)  |

|  |  |  |
|--|--|--|
|  |  |  |
|  |  |  |
|  |  |  |
|  |  |  |
|  |  |  |

| Type          | Order No | Qty. |
|---------------|----------|------|
| NPP/SRD 2,5 C | 451 189  | 50   |
|               |          |      |
|               |          |      |

| Type          | Order No | Qty. |
|---------------|----------|------|
| APP/SRD 2,5 C | 464 119  | 50   |
|               |          |      |
|               |          |      |

| Type  | Order No | Qty. |
|-------|----------|------|
| TF Ø2 | 493 020  | 5    |
|       |          |      |

| Type      | Order No | Qty. |
|-----------|----------|------|
| CS 1,5/2  | 470 002  | 25   |
| CS 1,5/3  | 470 003  | 20   |
| CS 1,5/4  | 470 004  | 15   |
| CS 1,5/5  | 470 005  | 10   |
| CS 1,5/10 | 470 009  | 5    |
|           |          |      |

|                                          |
|------------------------------------------|
| 8/3                                      |
| 1/A3                                     |
| IP20/NA                                  |
| D-NS 4,2x6, SLF-P1 W, KCSLF-W 11,2x100mm |

|    |
|----|
|    |
| 50 |

Cat No:

337 100

| Voltage, V ~ | Current, A | Cross-Section  |
|--------------|------------|----------------|
|              |            | 0,08 - 1,5 mm² |
|              |            |                |
|              |            |                |
|              |            |                |

|  |                |
|--|----------------|
|  | 0,08 - 1,5 mm² |
|  | 0,08 - 1,5 mm² |
|  | 0,5 mm²        |
|  | 28-16          |
|  | 8-10           |
|  | KT1 (0,4x2,5)  |

|  |  |  |
|--|--|--|
|  |  |  |
|  |  |  |
|  |  |  |
|  |  |  |
|  |  |  |

| Type          | Order No | Qty. |
|---------------|----------|------|
| NPP/SRD 2,5 C | 451 182T | 50   |
|               |          |      |
|               |          |      |

| Type        | Order No | Qty. |
|-------------|----------|------|
| APP/SRD 2,5 | 464 119  | 50   |
|             |          |      |
|             |          |      |

| Type  | Order No | Qty. |
|-------|----------|------|
| TF Ø2 | 493 020  | 5    |
|       |          |      |

| Type | Order No | Qty. |
|------|----------|------|
|      |          |      |
|      |          |      |
|      |          |      |
|      |          |      |
|      |          |      |

|                                          |
|------------------------------------------|
| 8/3                                      |
| 1/A3                                     |
| IP20/PE                                  |
| D-NS 4,2x6, SLF-P1 W, KCSLF-W 11,2x100mm |

|    |
|----|
|    |
| 50 |