


SRD 2,5 EA

SRD 2,5 EA

Width: 5,2 mm

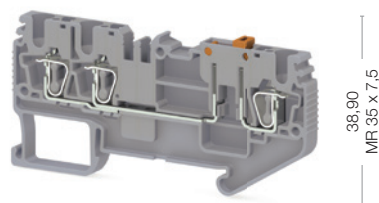


78,30

38,90
MF 35 x 7,5

SRD 2,5 EAK

Width: 5,2 mm

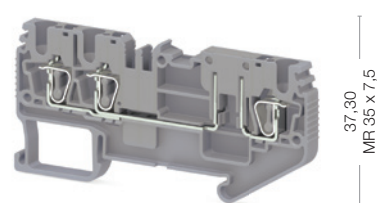

78,30

37,30
MF 35 x 7,5

Cat No:

311 279
311 270

Cat No:

311 309
311 300



Electrical Ratings

IEC (EN 60947-7-1/EN 60947-7-2)
UL
VDE (IEC 60947-7-1)
CSA
ATEX

Voltage, V ~	Current, A	Cross-Section
500	20	2,5 mm ²
300	20	AWG 28-12

Voltage, V ~	Current, A	Cross-Section
500	24	2,5 mm ²
300	20	AWG 28-12

Connection Data

Conductor cross section solid (min.-max.)
Conductor cross section stranded (min.-max.)
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve
AWG Conductor
Insulation Stripping Length (min.-max.)
Screwdriver

0,08 - 4 mm ²
0,14 - 2,5 mm ²
0,5 mm ²
28-12
8-10
KT1 (0,4x2,5)

0,08 - 4 mm ²
0,14 - 2,5 mm ²
0,5 mm ²
28-12
8-10
KT1 (0,4x2,5)

Technical Data For Diode

Diode Reverse Voltage
Diode Current
Diod

End Plate



Type	Order No	Qty.
NPP/SRD 2,5C	451 189	50

Type	Order No	Qty.
NPP/SRD 2,5C	451 189	50

Partition Plate



Type	Order No	Qty.
APP/SRD 2,5C	464 119	50

Type	Order No	Qty.
APP/SRD 2,5C	464 119	50

Test Plug



Type	Order No	Qty.
TF Ø2	493 020	5

Type	Order No	Qty.
TF Ø2	493 020	5

Cross Connection



Type	Order No	Qty.
CS 2,5/2	470 102	25
CS 2,5/3	470 103	20
CS 2,5/4	470 104	15
CS 2,5/5	470 105	10
CS 2,5/10	470 109	5
CS 2,5/20	470 170	10

Type	Order No	Qty.
CS 2,5/2	470 102	25
CS 2,5/3	470 103	20
CS 2,5/4	470 104	15
CS 2,5/5	470 105	10
CS 2,5/10	470 109	5
CS 2,5/20	470 170	10

Technical Data

Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type

8/3
1/A3
IP20/NA
D-NS 5,2x6, SLF-P1 W, KCSLF-W 11,2x100mm

8/3
1/A3
IP20/NA
D-NS 5,2x6, SLF-P1 W, KCSLF-W 11,2x100mm

Marking Tags (Dekafix)

See pages 326-333 for a list of Dekafix

Package Quantity

50

50

Color

Color code is the last digit of the order number

Blue	Orange
1	Z