


SRD 4 E


SRD 4 E

Width: 6,2 mm

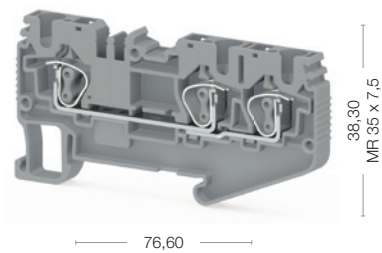

SRD 4 ED-A

Width: 6,2 mm

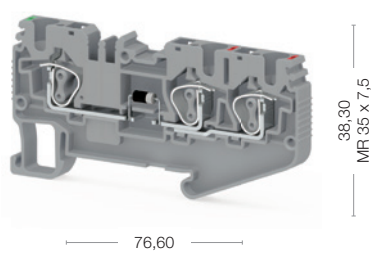

Electrical Ratings
IEC (EN 60947-7-1/EN 60947-7-2)
UL
VDE (IEC 60947-7-1)
CSA
ATEX

Connection Data
Conductor cross section solid (min.-max.)
Conductor cross section stranded (min.-max.)
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve
AWG Conductor
Insulation Stripping Length (min.-max.)
Screwdriver

Technical Data For Diode
Diode Reverse Voltage
Diode Current
Diod

End Plate

Partition Plate

Test Plug

Cross Connection

Technical Data
Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type
Marking Tags (Dekafix)
See pages 326-333 for a list of Dekafix

Package Quantity
50

Color						
Color code is the last digit of the order number						
Blue	Green	Yellow	Red	Black	White	Orange
1	2	3	4	5	6	7

Cat No:

- 311 709
- 311 700

Voltage, V ~	Current, A	Cross-Section
800	32	4 mm²
600	30	AWG 28-10

0,08 -6 mm²
0,14 - 4 mm²
1 mm²
28-10
8-10
KT3 (0,6x3,5)

Type	Order No	Qty.
NPP/SRD 4 E	451 199	50

Type	Order No	Qty.
APP/SRD 4E	464 129	50

Type	Order No	Qty.
TF Ø2	493 020	5

Type	Order No	Qty.
CS 4/2	470 112	25
CS 4/3	470 113	20
CS 4/4	470 114	15
CS 4/5	470 115	10
CS 4/10	470 119	5
CS 4/20	470 180	10

8/3
1/A3
IP20/NA
D-NS 6,2x6, SLF-P1 W

50

Cat No:

- 311 719
- 311 710

Voltage, V ~	Current, A	Cross-Section
800	1	4 mm²
300	1	AWG 28-10
The max. current is determined by the diode. Installed: Diode 1N 4007, reverse voltage: 1300 V, maximum continuous current: 0.5 A.		

0,08 -6 mm²
0,14 - 4 mm²
1 mm²
28-10
8-10
KT3 (0,6x3,5)

1000V
1 A
1 N 4007

Type	Order No	Qty.
NPP/SRD 4E	451 199	50

Type	Order No	Qty.
APP/SRD 4E	464 129	50

Type	Order No	Qty.
TF Ø2	493 020	5

Type	Order No	Qty.
CS 4/2	470 112	25
CS 4/3	470 113	20
CS 4/4	470 114	15
CS 4/5	470 115	10
CS 4/10	470 119	5
CS 4/20	470 180	10

8/3
1/A3
IP20/NA
D-NS 6,2x6, SLF-P1 W

50
