


SRD 6

SRD 6

Width: 8 mm

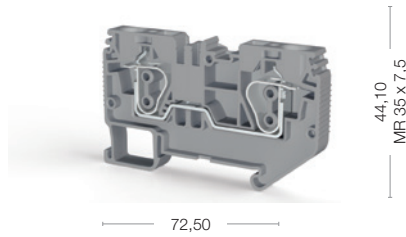

Cat No:

312 199
312 190



Electrical Ratings

IEC (EN 60947-7-1/EN 60947-7-2)
UL
VDE (IEC 60947-7-1)
CSA
ATEX

Connection Data

Conductor cross section solid (min.-max.)
Conductor cross section stranded (min.-max.)
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve
AWG Conductor
Insulation Stripping Length (min.-max.)
Screwdriver

End Block

End Plate



Partition Plate



Test Plug



Cross Connection



Technical Data

Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type

Marking Tags (Dekafix)

See pages 326-333 for a list of Dekafix

Package Quantity

Voltage, V ~	Current, A	Cross-Section
1000	41	6 mm ²
600	43	AWG 24-8

0,2 -10 mm ²
0,2 - 6 mm ²
1,5 mm ²
24-8
10-12
KTD 3 (0,6 x Ø3,5)

Type	Order No	Qty.
KD3	495 049	100
KD4	495 059	100
KD7	495 210	50
KD8	495 229	50

Type	Order No	Qty.
NPP/SRD 6	451 249	50

Type	Order No	Qty.
APP/SRD 6	464 179	50

Type	Order No	Qty.
TF Ø2,3	493 023	5


Type	Order No	Qty.
CS 6/2	470 122	25
CS 6/3	470 123	20
CS 6/4	470 124	15
CS 6/5	470 125	10
CS 6/10	470 129	5

8/3
1/A5
IP20/NA
D-NS 8x6, SLF-P1 W

50

SRD 6 E

Width: 8 mm

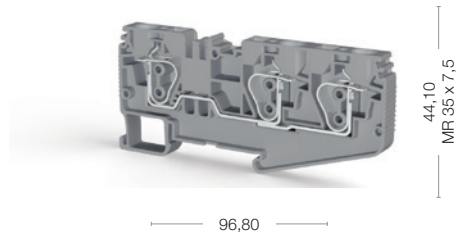

Cat No:

312 209
312 200

Voltage, V ~	Current, A	Cross-Section
1000	41	6 mm ²
600	43	AWG 24-8

0,2 -10 mm ²
0,2 - 6 mm ²
1,5 mm ²
24-8
10-12
KTD 3 (0,6 x Ø3,5)

Type	Order No	Qty.
KD3	495 049	100
KD4	495 059	100
KD7	495 210	50
KD8	495 229	50

Type	Order No	Qty.
NPP/SRD 6 E	451 259	50

Type	Order No	Qty.
APP/SRD 6 E	464 189	50

Type	Order No	Qty.
TF Ø2,3	493 023	5

Type	Order No	Qty.
CS 6/2	470 122	25
CS 6/3	470 123	20
CS 6/4	470 124	15
CS 6/5	470 125	10
CS 6/10	470 129	5

8/3
1/A5
IP20/NA
D-NS 8x6, SLF-P1 W

50
