


SRD 10


SRD 10

Width: 10 mm

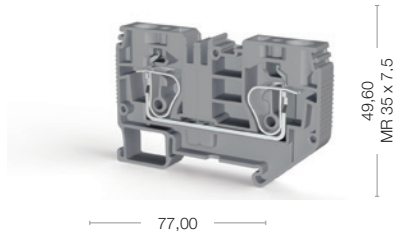

SRD 10 E

Width: 10 mm

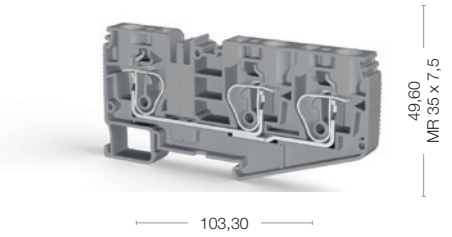

Cat No:

312 219
312 210

Cat No:

312 229
312 220



Electrical Ratings

IEC (EN 60947-7-1/EN 60947-7-2)
UL
VDE (IEC 60947-7-1)
CSA
ATEX

Voltage, V ~	Current, A	Cross-Section
1000	57	10 mm ²
600	60	AWG 20-6

Voltage, V ~	Current, A	Cross-Section
1000	57	10 mm ²
600	60	AWG 20-6

Connection Data

Conductor cross section solid (min.-max.)
Conductor cross section stranded (min.-max.)
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve
AWG Conductor
Insulation Stripping Length (min.-max.)
Screwdriver

0,2 - 16 mm ²
0,2 - 10 mm ²
2,5 mm ²
24-6
16-18
KTD 4 (0,8 x Ø4,0)

0,2 - 16 mm ²
0,2 - 10 mm ²
2,5 mm ²
24-6
16-18
KTD 4 (0,8 x Ø4,0)

End Block

Type	Order No	Qty.
KD3	495 049	100
KD4	495 059	100
KD7	495 210	50
KD8	495 229	50

Type	Order No	Qty.
KD3	495 049	100
KD4	495 059	100
KD7	495 210	50
KD8	495 229	50

End Plate



Type	Order No	Qty.
NPP/SRD 10	451 279	50

Type	Order No	Qty.
NPP/SRD 10 E	451 299	50

Partition Plate



Type	Order No	Qty.
APP/SRD 10	464 199	50

Type	Order No	Qty.
APP/SRD 10 E	464 219	50

Test Plug



Type	Order No	Qty.
TF Ø2,3	493 023	5

Type	Order No	Qty.
TF Ø2,3	493 023	5

Cross Connection



Type	Order No	Qty.
CS 10/2	470 132	25
CS 10/3	470 133	20
CS 10/4	470 134	15
CS 10/5	470 135	10
CS 10/10	470 139	5

Type	Order No	Qty.
CS 10/2	470 132	25
CS 10/3	470 133	20
CS 10/4	470 134	15
CS 10/5	470 135	10
CS 10/10	470 139	5

Technical Data

Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type

8/3
1/A6
IP20/NA
D-NS 10x6, SLF-P1 W

8/3
1/A6
IP20/NA
D-NS 10x6, SLF-P1 W

Marking Tags (Dekafix)

See pages 326-333 for a list of Dekafix

Package Quantity

50

50
