


SRD 16

SRD 16

Width: 12 mm


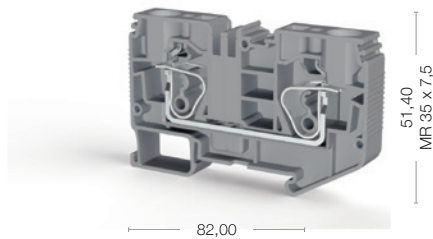


Cat No:

312 239
312 230

SRD 16 T

Width: 12 mm

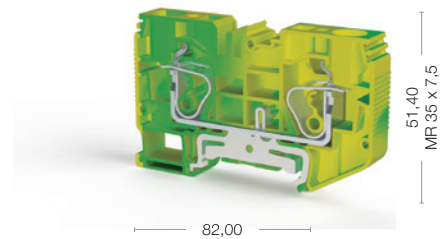

Cat No:

337 250



Electrical Ratings
IEC (EN 60947-7-1/EN 60947-7-2)
UL
VDE (IEC 60947-7-1)
CSA
ATEX

Voltage, V ~	Current, A	Cross-Section
1000	76	16 mm ²
600	78	AWG 16-4

Voltage, V ~	Current, A	Cross-Section
		16 mm ²
		AWG 16-4

Connection Data
Conductor cross section solid (min.-max.)
Conductor cross section stranded (min.-max.)
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve
AWG Conductor
Insulation Stripping Length (min.-max.)
Screwdriver

0,2 - 25 mm ²
0,2 - 16 mm ²
2,5 mm ²
24-4
17
KTD 5 (1,0 x Ø5,5)

0,2 - 25 mm ²
0,2 - 16 mm ²
2,5 mm ²
24-4
17
KTD 5 (1,0 x Ø5,5)

End Block

Type	Order No	Qty.
KD 3	495 049	100
KD 4	495 059	100
KD 7	495 210	50
KD 8	495 229	50

Type	Order No	Qty.
KD 3	495 049	100
KD 4	495 059	100
KD 7	495 210	50
KD 8	495 229	50

End Plate


Type	Order No	Qty.
NPP/SRD 16	451 289	50

Type	Order No	Qty.
NPP/SRD 16T	451 282T	50

Partition Plate


Type	Order No	Qty.
APP/SRD 16	464 209	50

Type	Order No	Qty.
APP/SRD 16	464 209	50

Test Plug


Type	Order No	Qty.
TF Ø2,3	493 023	5

Type	Order No	Qty.
TF Ø2,3	493 023	5

Cross Connection


Type	Order No	Qty.
CS 16/2	470 152	25

Type	Order No	Qty.

Technical Data
Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type
Marking Tags (Dekafix)
See pages 326-333 for a list of Dekafix

8/3
1/A7
IP20/NA
D-NS 12x6, SLF-P1 W

8/3
1/A7
IP20/NA
D-NS 12x6, SLF-P1 W

Package Quantity

50

50

Color						
Color code is the last digit of the order number						
Blue	Green	Yellow	Red	Black	White	Orange
1	2	3	4	5	6	7