


MYK Series Mini Terminals


MYK 2,5 C

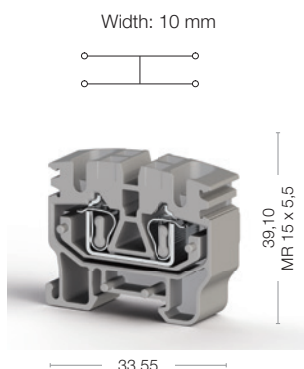

Cat No:

306 479
306 470


MYPK 2,5 C

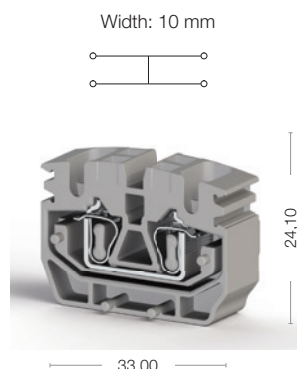

Cat No:

306 489
306 480

MYKR 2,5 C

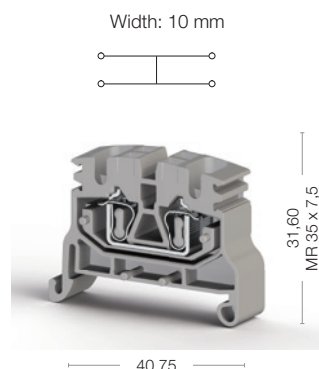

Cat No:

306 499
306 490



Electrical Ratings
CE (EN 60947-7-1)
UL
VDE (IEC 60947-7-1)
CSA
ATEX

Connection Data
Conductor cross section solid (min.-max.)
Conductor cross section stranded (min.-max.)
2 conductors with same cross section, stranded
TWIN ferrules with plastic sleeve
AWG Conductor
Insulation Stripping Length (min.-max.)
Screwdriver

End Plate

Push-in Cross Connection

Technical Data
Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type
Marking Tags (Dekafix)
See pages 326-333 for a list of Dekafix

Package Quantity

Voltage, V ~	Current, A	Cross-Section
800	24	2,5 mm ²

Type	Order No	Qty.
NPP 1 MYK 2,5C	446 429	100
NPP 2 MYK 2,5C	446 439	100

Voltage, V ~	Current, A	Cross-Section
800	24	2,5 mm ²

Type	Order No	Qty.
NPP MYPD 1	495 079	100
NPP MYPD 2	495 089	100

Voltage, V ~	Current, A	Cross-Section
800	24	2,5 mm ²

Type	Order No	Qty.
NPP 1 MYK	446 429	100
NPP 2 MYK	446 439	100

* For panel surface mounting

Color
Color code is the last digit of the order number
Blue
Green
Yellow
Red
Black
White
Orange
Brown
1
2
3
4
5
6
7
8