


MYK Series Mini Terminals

MYK 2,5

Width: 5 mm


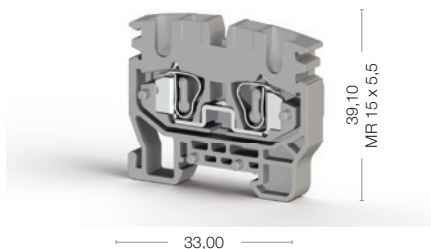


Cat No:

306 429
306 420

MYK 2,5 T

Width: 5 mm

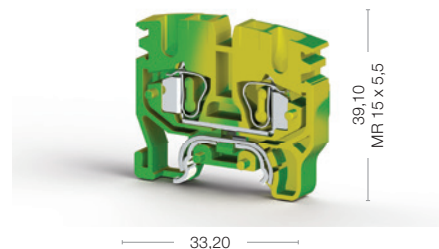

Cat No:

336 420



Electrical Ratings
CE (EN 60947-7-1 - EN 60947-7-2)
UL
VDE (IEC 60947-7-1)
CSA
ATEX

Connection Data
Conductor cross section solid (min.-max.)
Conductor cross section stranded (min.-max.)
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve
AWG Conductor
Insulation Stripping Length (min.-max.)
Screwdriver

End Plate

Push-in Cross Connection

Technical Data
Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type
Marking Tags (Dekafix)
See pages 326-333 for a list of Dekafix

Package Quantity
50 pcs.

Voltage, V ~	Current, A	Cross-Section
750	24	2,5 mm ²
600	20	AWG 22-12
320/500	18	0,5-2,5 mm ²

0,08-4 mm ²
0,08-2,5 mm ²
0,5 mm ²
AWG 28-12
9-10 mm
KTD 2 (0,5x3,0)

Type	Order No	Qty.
NPP 1 MYK	446 429	100
NPP 2 MYK	446 439	100

Type	Order No	Qty.
UK 2,5/2	476 222	25
UK 2,5/3	476 223	20
UK 2,5/4	476 224	15
UK 2,5/10	476 229	5
UK 2,5/16	474 260	10
UK 2,5/20	474 200	10

8/3
1/B3
IP 20 / -
DB 5

50 pcs.

Voltage, V ~	Current, A	Cross-Section
		2,5 mm ²
		AWG 22-12
		0,5-2,5 mm ²

0,08-4 mm ²
0,08-2,5 mm ²
0,5 mm ²
AWG 28-12
9-10 mm
KTD 2 (0,5x3,0)

Type	Order No	Qty.
NPP 1 MYK 2,5 T	446 422T	100
NPP 2 MYK 2,5 T	446 432T	100

8/3
1/B3
IP 20 / PE
DB 5

50 pcs.

Color							
Color code is the last digit of the order number							
Blue	Green	Yellow	Red	Black	White	Orange	Brown
1	2	3	4	5	6	7	8