

MYK Series Mini Terminals


MYPK 2,5

Width: 5 mm



MYSK 2,5

Width: 5 mm

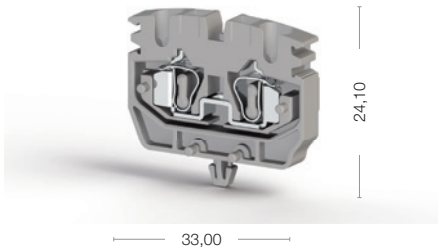

Cat No:

306 439
306 430

Cat No:

306 449
306 440



Electrical Ratings
CE (EN 60947-7-1 - EN 60947-7-2)
UL
VDE (IEC 60947-7-1)
CSA
ATEX

Voltage, V ~	Current, A	Cross-Section
750	24	2,5 mm ²
600	20	AWG 22-12
320/500	18	0,5-2,5 mm ²

Voltage, V ~	Current, A	Cross-Section
750	24	2,5 mm ²
600	20	AWG 22-12
320/500	18	0,5-2,5 mm ²

Connection Data
Conductor cross section solid (min.-max.)
Conductor cross section stranded (min.-max.)
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve
AWG Conductor
Insulation Stripping Length (min.-max.)
Screwdriver

	0,08-4 mm ²
	0,08-2,5 mm ²
	0,5 mm ²
	AWG 28-12
	9-10 mm
	KTD 2 (0,5x3,0)

	0,08-4 mm ²
	0,08-2,5 mm ²
	0,5 mm ²
	AWG 28-12
	9-10 mm
	KTD 2 (0,5x3,0)

End Plate	
	

Type	Order No	Qty.
NPP MYPD 1	495 079	100
NPP MYPD 2	495 089	100

Type	Order No	Qty.
NPP MYK 1	446 429	100
NPP MYK 2	446 439	100

Push-in Cross Connection	
	

Type	Order No	Qty.
UK 2,5/2	476 222	25
UK 2,5/3	476 223	20
UK 2,5/4	476 224	15
UK 2,5/10	476 229	5
UK 2,5/16	474 260	10
UK 2,5/20	474 200	10

Type	Order No	Qty.
UK 2,5/2	476 222	25
UK 2,5/3	476 223	20
UK 2,5/4	476 224	15
UK 2,5/10	476 229	5
UK 2,5/16	474 260	10
UK 2,5/20	474 200	10

Technical Data
Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type
Marking Tags (Dekafix)
See pages 326-333 for a list of Dekafix

8/3
1/B3
IP 20 / -
DB 5

8/3
1/B3
IP 20 / -
DB 5

Package Quantity

100 pcs.

100 pcs.

* For panel surface Mounting

* 3.5 mm (diameter) hole must be opened on panel surface.

