


PAK Series

PAK 25-35

Width: 27 mm

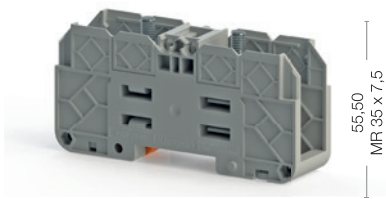

107


55,50
MR 35 x 7,5

Cat No:

313 009

PAK 25-35 KK

Width: 27 mm

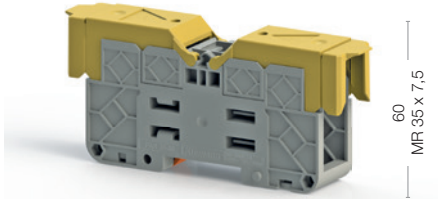

135

60
MR 35 x 7,5

Cat No:

313 019



Electrical Ratings
CE (EN 60947-7-1 / EN 60947-7-2)
UL
VDE (IEC 60947-7-1)
CSA
ATEX

Connection Data
Connection in acc. with standard
Cable lugs DIN 46234
Cable lugs DIN 46235
Cable lugs DIN 46234
Cable lugs DIN 46235
Bolt
Tightening torque, min
Tightening torque max

Protection Cover	
	Yellow
	Blue
	Yellow-Green

Comb Connection


Technical Data
Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type
Marking Tags (Dekafix)
See pages 326-333 for a list of Dekafix

Package Quantity

Voltage, V ~	Current, A	Cross-Section
1000	125	2,5-50 mm²

DIN 46234 / DIN46235
2,5 - 50 mm²
6 - 25 mm²
14 - 1/0 AWG
10 - 4 AWG
M 6
3 Nm
6 Nm

Type	Order No	Qty.
COVER PAK 25-35	466 173	10
	466 171	
	466 172T	

Type	Order No	Qty.
UK 35/2	472 002	5
UK 35/3	472 003	5

8/3
1/NA
IP 20
DG 10/6, D-NS 12x10, SLF-P1W

10 pcs.

Voltage, V ~	Current, A	Cross-Section
1000	125	2,5-50 mm²

DIN 46234 / DIN46235
2,5 - 50 mm²
6 - 25 mm²
14 - 1/0 AWG
10 - 4 AWG
M 6
3 Nm
6 Nm

Type	Order No	Qty.

Type	Order No	Qty.
UK 35/2	472 002	5
UK 35/3	472 003	5

8/3
1/NA
IP 20
DG 10/6, D-NS 12x10, SLF-P1W

10 pcs.
