


# PCY Type Terminals for PCB Connection

## PCY 2,5

Width: 5,05 mm

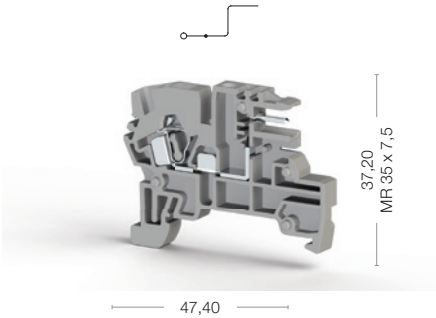


Cat No:

- 364 019
- 364 010

## PCY 2,5 N

Width: 5,05 mm

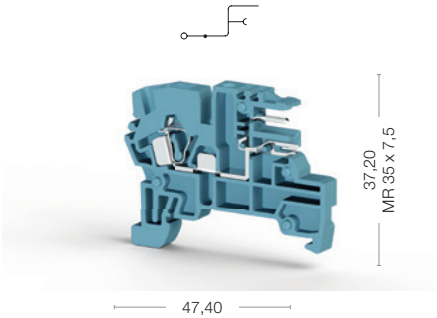

Cat No:

- 364 080



| Electrical Ratings  |
|---------------------|
| CE (EN 60947-7-1)   |
| UL                  |
| VDE (IEC 60947-7-1) |
| CSA                 |
| ATEX                |

| Connection Data                                                                   |
|-----------------------------------------------------------------------------------|
| Conductor cross section solid (min.-max.)                                         |
| Conductor cross section stranded (min.-max.)                                      |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve |
| AWG Conductor                                                                     |
| Insulation Stripping Length (min.-max.)                                           |
| Screwdriver                                                                       |

| Ordering Data |
|---------------|
|               |
|               |
|               |

| End Plate                                                                           |
|-------------------------------------------------------------------------------------|
|  |

| Isolation Cover                                                                                             |
|-------------------------------------------------------------------------------------------------------------|
|  Grey<br>Beige<br>Orange |

| Push-in Cross Connection                                                            |
|-------------------------------------------------------------------------------------|
|  |

| Neutral Bus Bar                                                                     |
|-------------------------------------------------------------------------------------|
|  |

| Technical Data                                                      |
|---------------------------------------------------------------------|
| Rated Impulse Voltage / Pollution severity                          |
| Insulation material group / Gauge pin code according to IEC 60947-1 |
| Protection class / Protection conductor type                        |
| Marking Tags (Dekafix)                                              |
| See pages 326-333 for a list of Dekafix                             |

| Package Quantity |
|------------------|
| 100 pcs.         |

| Voltage, V ~ | Current, A | Cross-Section |
|--------------|------------|---------------|
| 250          | 10         | 2,5 mm²       |
| 300          | 10         | AWG 22-12     |
|              |            |               |
|              |            |               |

|                 |
|-----------------|
| 0,08-4 mm²      |
| 0,08-2,5 mm²    |
| 0,5 mm²         |
| AWG 28-12       |
| 9-10 mm         |
| KTD 2 (0,5x3,0) |

| Type        | Order No | Qty. |
|-------------|----------|------|
| NPP/PCY 2,5 | 450 199  | 100  |
|             |          |      |
|             |          |      |

| Type        | Order No | Qty. |
|-------------|----------|------|
| NPP/PCY 2,5 | 450 191  | 100  |
|             |          |      |
|             |          |      |

| Type   | Order No | Qty. |
|--------|----------|------|
| PCY IT | 423 099  | 50   |
| PCY IT | 423 090  | 50   |
| PCY IT | 423 097  | 50   |

| Type      | Order No | Qty. |
|-----------|----------|------|
| UK 2,5/2  | 476 222  | 25   |
| UK 2,5/3  | 476 223  | 20   |
| UK 2,5/4  | 476 224  | 15   |
| UK 2,5/10 | 476 229  | 5    |

| Type   | Order No | Qty. |
|--------|----------|------|
| PCY NS | 525 400  | 25   |
|        |          |      |
|        |          |      |

|                        |
|------------------------|
| 4/3                    |
| 1/A3                   |
| IP 20 / -              |
| D-NS 5x6, DB 5, DG 6/5 |

|          |
|----------|
| 100 pcs. |
|----------|

| Voltage, V ~ | Current, A | Cross-Section |
|--------------|------------|---------------|
| 250          | 10         | 2,5 mm²       |
| 300          | 10         | AWG 22-12     |
|              |            |               |
|              |            |               |

|                 |
|-----------------|
| 0,08-4 mm²      |
| 0,08-2,5 mm²    |
| 0,5 mm²         |
| AWG 28-12       |
| 9-10 mm         |
| KTD 2 (0,5x3,0) |

| Type          | Order No | Qty. |
|---------------|----------|------|
| NPP/PCY 2,5 N | 450 191  | 100  |
|               |          |      |
|               |          |      |

| Type   | Order No | Qty. |
|--------|----------|------|
| PCY IT | 423 099  | 50   |
| PCY IT | 423 090  | 50   |
| PCY IT | 423 097  | 50   |

| Type      | Order No | Qty. |
|-----------|----------|------|
| UK 2,5/2  | 476 222  | 25   |
| UK 2,5/3  | 476 223  | 20   |
| UK 2,5/4  | 476 224  | 15   |
| UK 2,5/10 | 476 229  | 5    |

| Type   | Order No | Qty. |
|--------|----------|------|
| PCY NS | 525 400  | 25   |
|        |          |      |
|        |          |      |

|                        |
|------------------------|
| 4/3                    |
| 1/A3                   |
| IP 20 / -              |
| D-NS 5x6, DB 5, DG 6/5 |

|          |
|----------|
| 100 pcs. |
|----------|