


PCY Type Terminals for PCB Connection

PCY 2,5

Width: 5,05 mm

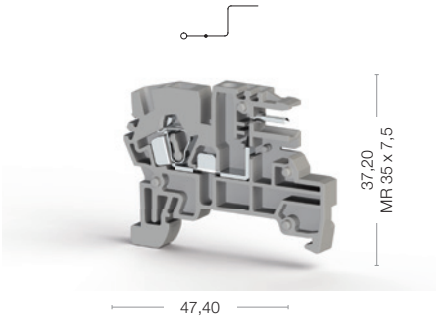


Cat No:

- 364 019
- 364 010

PCY 2,5 N

Width: 5,05 mm

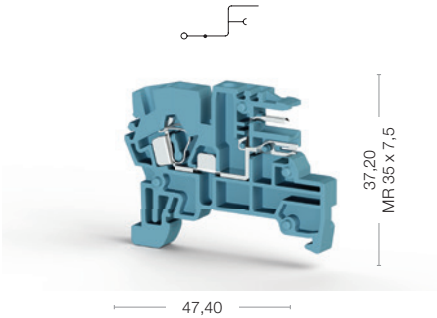

Cat No:

- 364 080



Electrical Ratings
CE (EN 60947-7-1)
UL
VDE (IEC 60947-7-1)
CSA
ATEX

Connection Data
Conductor cross section solid (min.-max.)
Conductor cross section stranded (min.-max.)
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve
AWG Conductor
Insulation Stripping Length (min.-max.)
Screwdriver

Ordering Data

End Plate


Isolation Cover
 Grey Beige Orange

Push-in Cross Connection


Neutral Bus Bar


Technical Data
Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type
Marking Tags (Dekafix)
See pages 326-333 for a list of Dekafix

Package Quantity
100 pcs.

Voltage, V ~	Current, A	Cross-Section
250	10	2,5 mm²
300	10	AWG 22-12

0,08-4 mm²
0,08-2,5 mm²
0,5 mm²
AWG 28-12
9-10 mm
KTD 2 (0,5x3,0)

Type	Order No	Qty.
NPP/PCY 2,5	450 199	100

Type	Order No	Qty.
NPP/PCY 2,5	450 191	100

Type	Order No	Qty.
PCY IT	423 099	50
PCY IT	423 090	50
PCY IT	423 097	50

Type	Order No	Qty.
UK 2,5/2	476 222	25
UK 2,5/3	476 223	20
UK 2,5/4	476 224	15
UK 2,5/10	476 229	5

Type	Order No	Qty.
PCY NS	525 400	25

4/3
1/A3
IP 20 / -
D-NS 5x6, DB 5, DG 6/5

100 pcs.

Voltage, V ~	Current, A	Cross-Section
250	10	2,5 mm²
300	10	AWG 22-12

0,08-4 mm²
0,08-2,5 mm²
0,5 mm²
AWG 28-12
9-10 mm
KTD 2 (0,5x3,0)

Type	Order No	Qty.
NPP/PCY 2,5 N	450 191	100

Type	Order No	Qty.
PCY IT	423 099	50
PCY IT	423 090	50
PCY IT	423 097	50

Type	Order No	Qty.
UK 2,5/2	476 222	25
UK 2,5/3	476 223	20
UK 2,5/4	476 224	15
UK 2,5/10	476 229	5

Type	Order No	Qty.
PCY NS	525 400	25

4/3
1/A3
IP 20 / -
D-NS 5x6, DB 5, DG 6/5

100 pcs.
