


Double Deck Earth Terminals


PIK 2,5 NT

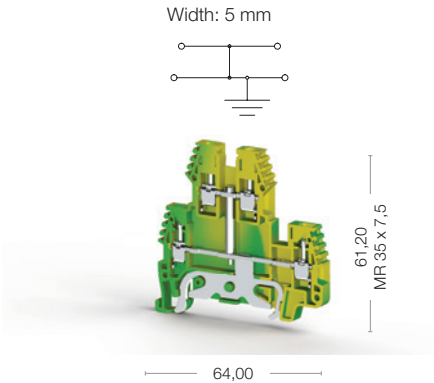

Cat No:

336 560

PIK 4 NT

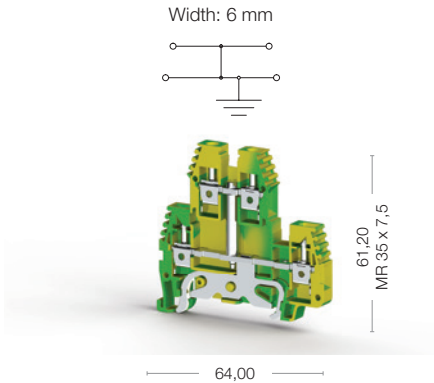

Cat No:

336 570



Electrical Ratings
CE (EN 60947-7-2)
UL
VDE (IEC 60947-7-1)
CSA
ATEX

Connection Data
Conductor cross section solid (min.-max.)
Conductor cross section stranded (min.-max.)
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, (min.-max.)
AWG Conductor
Insulation Stripping Length (min.-max.)
Torque
Screwdriver

End Plate - Disconnect Plate


Technical Data
Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type
Marking Tags (Dekafix)
See pages 326-333 for a list of Dekafix

Package Quantity
100 pcs.

Voltage, V ~	Current, A	Cross-Section
		2,5 mm²
		0,5-4 mm²

	0,2-4 mm²
	0,2-4 mm²
	0,5-1,5 mm²
	AWG 24-12
	9-10 mm
	0,4-0,6 Nm
	IKTD 3 (0,6x3,5)

Type	Order No	Qty.
NPP/PIK 2,5 - 4 NT	449 012T	25

8/3
1/A3
IP 20 / PE
D-NS 5x10, DB 10/5, DG 10/5, DG 10/5T

100 pcs.

Voltage, V ~	Current, A	Cross-Section
		4 mm²
		0,5-6 mm²

	0,2-6 mm²
	0,2-6 mm²
	0,5-2,5 mm²
	AWG 24-10
	9-10 mm
	0,5-08 Nm
	IKTD 3 (0,6x3,5)

Type	Order No	Qty.
NPP/PIK 2,5 - 4 NT	449 012T	25

8/3
1/A4
IP 20 / PE
D-NS 6x10, DB 10/6, DG 10/6, DG 10/6T

100 pcs.
