


Screw Type Double - Deck Terminals


PIK 2,5 N

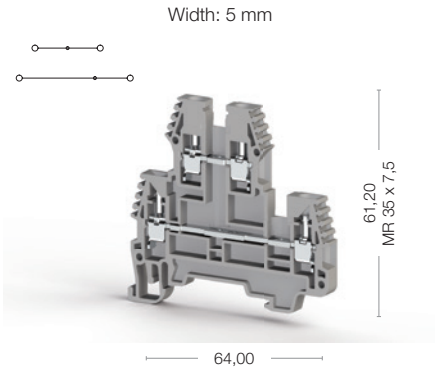

Cat No:

- 317 109
- 317 100

PIK 2,5 RD

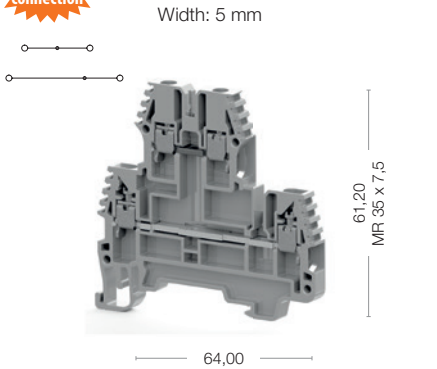

Cat No:

- 325 249
- 325 241
- 325 240



Electrical Ratings
CE (EN 60947-7-1)
UL
VDE (IEC 60947-7-1)
CSA
ATEX

Voltage, V ~	Current, A	Cross-Section
500	24	2,5 mm²
300	20	AWG 26-12
400	19	0,5-2,5 mm²

Voltage, V ~	Current, A	Cross-Section
500	24	2,5 mm²

Connection Data
Conductor cross section solid (min-max.)
Conductor cross section stranded (min.-max.)
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, (min-max.)
AWG Conductor
Insulation Stripping Length (min.-max.)
Torque (min-max.)
Screwdriver

0,2-4 mm²
0,2-4 mm²
0,5-1,5 mm²
AWG 24-12
9-10 mm
0,4-0,6 Nm
IKTD 3 (0,6x3,5)

0,2-4 mm²
0,2-4 mm²
0,5-1,5 mm²
AWG 24-12
9-10 mm
0,4-0,6 Nm
IKTD 3 (0,6x3,5)

Ordering Data

Technical Data For Diode
Diode Voltage
Diode Current
Diod

End Plate

Type	Order No	Qty.
NPP/PIK 2,5-4 N	449 019	25

Type	Order No	Qty.
NPP/PIK 2,5-4 N	449 019	25

Small Partition

Type	Order No	Qty.
AD 1	467 919	100

Cross Connection

Type	Order No	Qty.
UK 2,5/2	474 122	25
UK 2,5/3	474 123	20
UK 2,5/4	474 124	15
UK 2,5/10	474 129	5
UK 2,5/50	474 210	20

Type	Order No	Qty.
UK 2,5/2	476 222	25
UK 2,5/3	476 223	20
UK 2,5/4	476 224	15
UK 2,5/10	476 229	5
UK 2,5/16	474 260	10
UK 2,5/20	474 200	10
UK 2,5/50	476 350	5

Technical Data
Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type
Marking Tags (Dekafix)
See pages 326-333 for a list of Dekafix

6/3
1/A3
IP 20 / -
D-NS 5x10, DB 10/5, DG 10/5, DG 10/5T

6/3
1/A3
IP 20 / -
D-NS 5x10, DB 10/5, DG 10/5, DG 10/5T

Package Quantity
42

100 pcs.

100 pcs.
