


Screw Type Double - Deck Terminals

PIK 10 N

Width: 10 mm

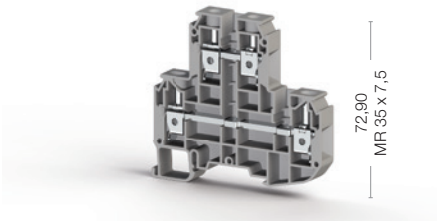

78,65

Cat No:

- 319 909
- 319 900

PIK 4 FS

Width: 6 mm



70,60

Cat No:

- 319 809
- 319 800



Electrical Ratings
CE (EN 60947-7-1)
UL
VDE (IEC 60947-7-1)
CSA
ATEX

Connection Data
Conductor cross section solid (min.-max.)
Conductor cross section stranded (min.-max.)
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, (min.-max.)
AWG Conductor
Insulation Stripping Length (min.-max.)
Torque (min.-max.)
Screwdriver

End Plate - Disconnect Plate

Cross Connection

Technical Data
Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type
Marking Tags (Dekafix)
See pages 326-333 for a list of Dekafix

Package Quantity
20 pcs.

Voltage, V ~	Current, A	Cross-Section
800	57	10 mm²
500	50	1,5-16 mm²

1,5-16 mm²
1,5-16 mm²
6 mm²
AWG 16-6
10-12 mm
1,2-1,8 Nm
IKTD 4 (0,8x4,0)

Type	Order No	Qty.
NPP/PIK 10 N	449 039	25

Type	Order No	Qty.
UK 10/2	474 152	25
UK 10/3	474 153	20
UK 10/4	474 154	15
UK 10/10	474 159	5

8/3
1/B6
IP 20 / -
DB 5

Voltage, V ~	Current, A	Cross-Section
400	20	4 mm²
400	17	0,5-4 mm²

0,2-4 mm²
0,2-4 mm²
0,5-1,5 mm²
AWG 24-10
9-10 mm
0,5-0,8 Nm
IKTD 3 (0,6x3,5)

Type	Order No	Qty.
NPP/PIK 4 FS	449 029	20

Type	Order No	Qty.
UK 4/2	476 232	25
UK 4/3	476 233	20
UK 4/4	476 234	15
UK 4/10	476 239	5

4/3
1/A4
IP 20 / -
DB 5

Package Quantity
85 pcs.