


Screw Type Double - Deck Terminals

PIK 4 N

Width: 6 mm

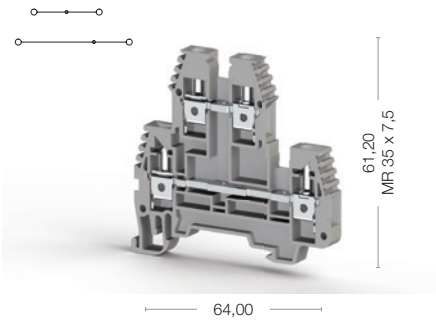


Cat No:

- 319 109
- 319 101
- 319 100

PIK 4 RD

Width: 6 mm

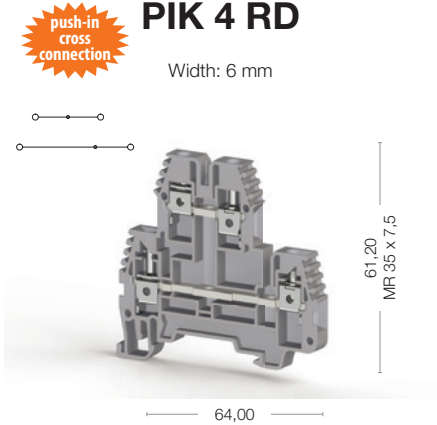

Cat No:

- 325 349
- 324 341
- 325 340



Electrical Ratings
CE (EN 60947-7-1)
UL
VDE (IEC 60947-7-1)
CSA
ATEX

Connection Data
Conductor cross section solid (min-max.)
Conductor cross section stranded (min.-max.)
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, (min-max.)
AWG Conductor
Insulation Stripping Length (min.-max.)
Torque (min-max.)
Screwdriver

Ordering Data

Technical Data For Diode
Diode Voltage
Diode Current
Diod

End Plate

Small Partition

Cross Connection

Technical Data
Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type
Marking Tags (Dekafix)
See pages 326-333 for a list of Dekafix

Package Quantity
44

Voltage, V ~	Current, A	Cross-Section
500	32	4 mm²
300	30	AWG 26-10
400	26	0,5-4 mm²

0,2-6 mm²
0,2-6 mm²
0,5-2,5 mm²
AWG 24-10
9-10 mm
0,5-0,8 Nm
IKTD 3 (0,6x3,5)

Type	Order No	Qty.
NPP PIK 2,5-4 N	449 019	25

Type	Order No	Qty.
AD 1	467 919	100

Type	Order No	Qty.
UK 4/2	474 132	25
UK 4/3	474 133	20
UK 4/4	474 134	15
UK 4/10	474 139	5
UK 4/20	474 180	5
UK 4/50	474 190	5

6/3
1/A4
IP 20 / -
D-NS 6x10, DB 10/6, DG 10/6, DG 10/6T

100 pcs.

Voltage, V ~	Current, A	Cross-Section
500	32	4 mm²

0,2-6 mm²
0,2-6 mm²
0,5-2,5 mm²
AWG 24-10
9-10 mm
0,5-0,8 Nm
IKTD 3 (0,6x3,5)

Type	Order No	Qty.
NPP PIK 4 N	449 019	25

Type	Order No	Qty.

Type	Order No	Qty.
UK 4/2	476 232	25
UK 4/3	476 233	20
UK 4/4	476 234	15
UK 4/10	476 239	5
UK 4/50	476 360	5

6/3
1/A4
IP 20 / -
D-NS 6x10, DB 10/6, DG 10/6, DG 10/6T

100 pcs.
