


PRD 1

Coming
Soon...

PRD 1

Width: 3,6 mm

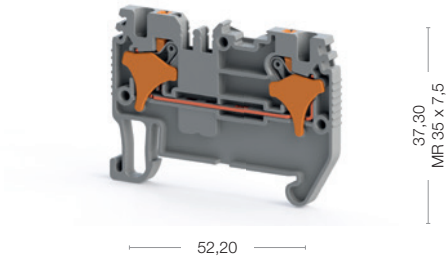


Cat No:

- 328 009
- 328 000

PRD 1T

Width: 3,6 mm

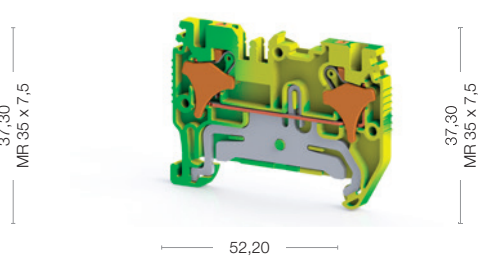

Cat No:

- 337 580



Electrical Ratings
IEC (EN 60947-7-1/EN 60947-7-2)
UL
VDE (IEC 60947-7-1)
CSA
ATEX

Connection Data
Conductor cross section solid (min.-max.)
Conductor cross section stranded (min.-max.)
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve
AWG Conductor
Insulation Stripping Length (min.-max.)
Screwdriver

Technical Data For Diode
Diode Reverse Voltage
Diode Current
Diod

End Plate

Partition Plate

Test Plug

Cross Connection

Technical Data
Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type
Marking Tags (Dekafix)
See pages 326-333 for a list of Dekafix

Package Quantity
50

Voltage, V ~	Current, A	Cross-Section
800	17,5	1 mm²

0,08 - 1,5 mm²
0,14 - 1,5 mm²
28-16
8-10
KT1 (0,4x2,5)

Type	Order No	Qty.
NPP/SRD 2,5	451 059	50

Type	Order No	Qty.
APP/SRD 2,5	464 029	50

Type	Order No	Qty.
TF Ø2	493 020	5

Type	Order No	Qty.
CS 1/2	469 902	25
CS 1/3	470 903	20
CS 1/4	471 904	15
CS 1/5	472 905	10
CS 1/10	473 909	5

8/3
1/A1/B1
IP20/NA
D-NS 3,6x6, SLF-P1 W

50

Voltage, V ~	Current, A	Cross-Section
		1 mm²

0,08 - 1,5 mm²
0,14 - 1,5 mm²
28-16
8-10
KT1 (0,4x2,5)

Type	Order No	Qty.
NPP/SRD 2,5	451 052T	50

Type	Order No	Qty.
APP / SRD 2.5	464 029	50

Type	Order No	Qty.
TF Ø2	493 020	5

Type	Order No	Qty.

8/3
1/A1/B1
IP20/PE
D-NS 3,6x6, SLF-P1 W

50
