
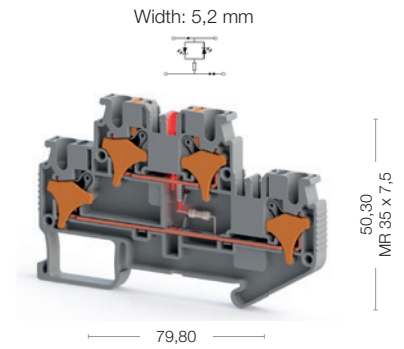


PRD 2,5-2F

PRD 2,5-2FK

PRD 2,5-2FLD-24V AC/DC

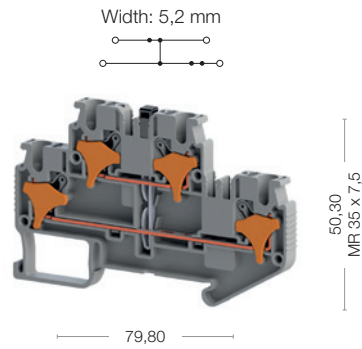

Cat No:

328 519
328 510

Cat No:

328 419
328 410



Electrical Ratings

IEC (EN 60947-7-1/EN 60947-7-2)
UL
VDE (IEC 60947-7-1)
CSA
ATEX

Connection Data

Conductor cross section solid (min.-max.)
Conductor cross section stranded (min.-max.)
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve
AWG Conductor
Insulation Stripping Length (min.-max.)
Screwdriver

Technical Data For Diode

Diode Reverse Voltage
Diode Current
Diod

End Plate



Partition Plate



Test Plug



Cross Connection



Technical Data

Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type

Marking Tags (Dekafix)

See pages 326-333 for a list of Dekafix

Package Quantity

Voltage, V ~	Current, A	Cross-Section
500	24	2,5 mm²

0,08 - 4 mm²
0,14 - 2,5 mm²
0,5 mm²
28-12
8-10
KT1 (0,4x2,5)

Type	Order No	Qty.
NPP/SRD 2,5_2F	451 079	50

Type	Order No	Qty.
APP/SRD 2,5_2F	464 069	50

Type	Order No	Qty.
TF Ø2	493 020	5

Type	Order No	Qty.
CS 2,5/2	470 102	25
CS 2,5/3	470 103	20
CS 2,5/4	470 104	15
CS 2,5/5	470 105	10
CS 2,5/10	470 109	5
CS 2,5/20	470 170	10

6/3
1/A3
IP20/NA

D-NS 5,2x6, SLF-P2 W, KCSLF-W 4,9x100mm

50

Voltage, V ~	Current, A	Cross-Section
24	24	2,5 mm²

0,08 - 4 mm²
0,14 - 2,5 mm²
0,5 mm²
28-12
8-10
KT1 (0,4x2,5)

Type	Order No	Qty.
NPP/SRD 2,5_2F	451 079	50

Type	Order No	Qty.
APP/SRD 2,5_2F	464 069	50

Type	Order No	Qty.
TF Ø2	493 020	5

Type	Order No	Qty.
CS 2,5/2	470 102	25
CS 2,5/3	470 103	20
CS 2,5/4	470 104	15
CS 2,5/5	470 105	10
CS 2,5/10	470 109	5
CS 2,5/20	470 170	10

6/3
1/A3
IP20/NA

D-NS 5,2x6, SLF-P2 W, KCSLF-W 4,9x100mm

25
