


PRD 2,5-3FK

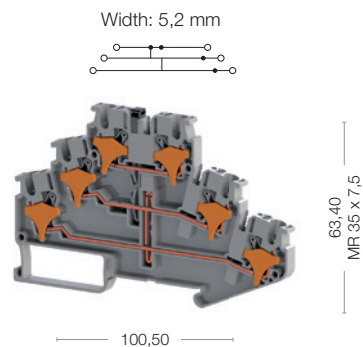

Cat No:

- 328 569
- 328 560

| Voltage, V ~ | Current, A | Cross-Section |
|--------------|------------|---------------|
| 500          | 24         | 2,5 mm²       |
|              |            |               |
|              |            |               |
|              |            |               |

|                |
|----------------|
| 0,08 - 4 mm²   |
| 0,14 - 2,5 mm² |
| 0,5 mm²        |
| 28-12          |
| 8-10           |
| KT1 (0,4x2,5)  |

|  |
|--|
|  |
|  |
|  |
|  |

| Type           | Order No | Qty. |
|----------------|----------|------|
| NPP/SRD 2,5_3F | 451 109  | 50   |
|                |          |      |
|                |          |      |

| Type | Order No | Qty. |
|------|----------|------|
|      |          |      |
|      |          |      |
|      |          |      |

| Type  | Order No | Qty. |
|-------|----------|------|
| TF Ø2 | 493 020  | 5    |
|       |          |      |

| Type      | Order No | Qty. |
|-----------|----------|------|
| CS 2,5/2  | 470 102  | 25   |
| CS 2,5/3  | 470 103  | 20   |
| CS 2,5/4  | 470 104  | 15   |
| CS 2,5/5  | 470 105  | 10   |
| CS 2,5/10 | 470 109  | 5    |
| CS 2,5/20 | 470 170  | 10   |

|                                         |
|-----------------------------------------|
| 6/3                                     |
| 1/A3                                    |
| IP20/NA                                 |
| D-NS 5,2x6, SLF-P2 W, KCSLF-W 4,9x100mm |

|    |
|----|
| 50 |
|----|