



PRD 2,5-3F

PRD 2,5-3F

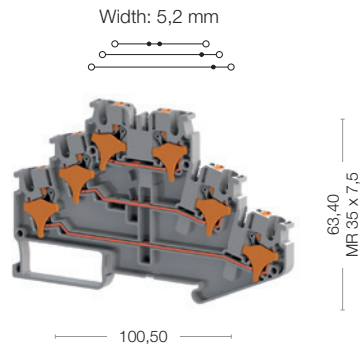

PRD 2,5-2KF

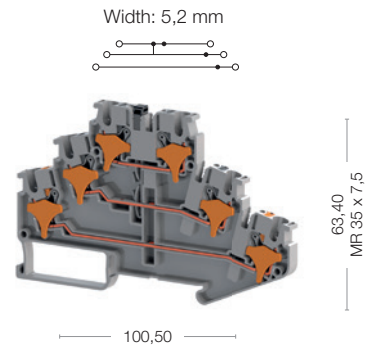

Cat No:

328 559 328 551
328 550

Cat No:

328 579
328 570



Electrical Ratings

IEC (EN 60947-7-1/EN 60947-7-2)
UL
VDE (IEC 60947-7-1)
CSA
ATEX

Voltage, V ~ Current, A Cross-Section

400 24 2,5 mm²

Voltage, V ~ Current, A Cross-Section

400 24 2,5 mm²

Connection Data

Conductor cross section solid (min.-max.)
Conductor cross section stranded (min.-max.)
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve
AWG Conductor
Insulation Stripping Length (min.-max.)
Screwdriver

0,08 - 4 mm²
0,14 - 2,5 mm²
0,5 mm²
28-12
8-10
KT1 (0,4x2,5)

0,08 - 4 mm²
0,14 - 2,5 mm²
0,5 mm²
28-12
8-10
KT1 (0,4x2,5)

Technical Data For Diode

Diode Reverse Voltage
Diode Current
Diod

End Plate



Type Order No Qty.

NPP/SRD 2,5_3F 451 109 50

Type Order No Qty.

NPP/SRD 2,5_3F 451 109 50

Partition Plate

Type Order No Qty.

Type Order No Qty.

Test Plug



Type Order No Qty.

TF Ø2 493 020 5

Type Order No Qty.

TF Ø2 493 020 5

Cross Connection



Type Order No Qty.

CS 2,5/2 470 102 25
CS 2,5/3 470 103 20
CS 2,5/4 470 104 15
CS 2,5/5 470 105 10
CS 2,5/10 470 109 5
CS 2,5/20 470 170 10

Type Order No Qty.

CS 2,5/2 470 102 25
CS 2,5/3 470 103 20
CS 2,5/4 470 104 15
CS 2,5/5 470 105 10
CS 2,5/10 470 109 5
CS 2,5/20 470 170 10

Technical Data

Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type

4/3
1/A3
IP20/NA

4/3
1/A3
IP20/NA

Marking Tags (Dekafix)

See pages 326-333 for a list of Dekafix

D-NS 5,2x6, SLF-P2 W, KCSLF-W 4,9x100mm

D-NS 5,2x6, SLF-P2 W, KCSLF-W 4,9x100mm

Package Quantity

50

50