
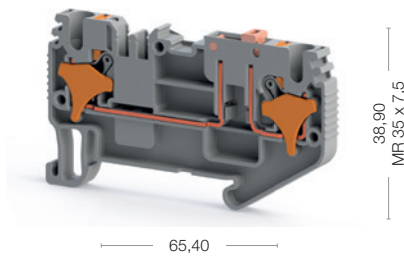



PRD 2,5 A

Width: 5,2 mm




PRD 2,5 AK

Width: 5,2 mm

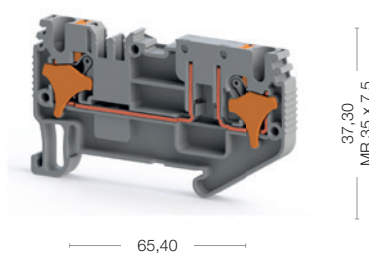

PRD 2,5 AA

Width: 5,2 mm

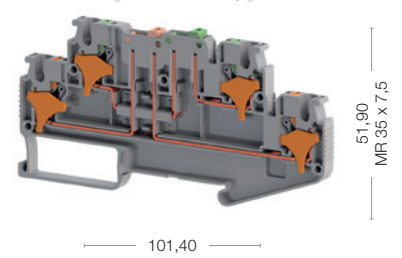

Cat No:

328 239
328 230

Voltage, V ~	Current, A	Cross-Section
500	20	2,5 mm ²

0,08 - 4 mm ²
0,14 - 2,5 mm ²
0,5 mm ²
28-12
8-10
KT1 (0,4x2,5)

Type	Order No	Qty.
NPP/SRD 2,5E	451 159	50

Type	Order No	Qty.
APP/SRD 2,5E	464 079	50

Type	Order No	Qty.
TF Ø2	493 020	5

Type	Order No	Qty.
CS 2,5/2	470 102	25
CS 2,5/3	470 103	20
CS 2,5/4	470 104	15
CS 2,5/5	470 105	10
CS 2,5/10	470 109	5
CS 2,5/20	470 170	10

6/3
1/A3
IP20/NA
D-NS 5,2x6, SLF-P1 W

50

Cat No:

328 269
328 260

Voltage, V ~	Current, A	Cross-Section
500	20	2,5 mm ²

0,08 - 4 mm ²
0,14 - 2,5 mm ²
0,5 mm ²
28-12
8-10
KT1 (0,4x2,5)

Type	Order No	Qty.
NPP/SRD 2,5E	451 159	50

Type	Order No	Qty.
APP/SRD 2,5E	464 079	50

Type	Order No	Qty.
TF Ø2	493 020	5

Type	Order No	Qty.
CS 2,5/2	470 102	25
CS 2,5/3	470 103	20
CS 2,5/4	470 104	15
CS 2,5/5	470 105	10
CS 2,5/10	470 109	5
CS 2,5/20	470 170	10

6/3
1/A3
IP20/NA
D-NS 5,2x6, SLF-P1 W

50

Cat No:

328 739
328 730

Voltage, V ~	Current, A	Cross-Section
400	20	2,5 mm ²

0,08 - 4 mm ²
0,14 - 2,5 mm ²
0,5 mm ²
28-12
8-10
KT1 (0,4x2,5)

Type	Order No	Qty.
NPP/PRD 2,5AA	451 449	50

Type	Order No	Qty.

Type	Order No	Qty.
TF Ø2	493 020	5

Type	Order No	Qty.
CS 2,5/2	470 102	25
CS 2,5/3	470 103	20
CS 2,5/4	470 104	15
CS 2,5/5	470 105	10
CS 2,5/10	470 109	5
CS 2,5/20	470 170	10

6/3
1/A3
IP20/NA
D-NS 5,2x6, SLF-P1 W

50
