


PRD 2,5 CAD-A

Width: 5,2 mm

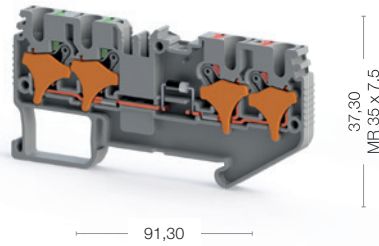

Cat No:

328 329
328 320

Voltage, V ~	Current, A	Cross-Section
500	1	2,5 mm ²
The max. current is determined by the diode. Installed: Diode 1N 4007, reverse voltage: 1300 V, maximum continuous current: 0.5 A.		

0,08 - 4 mm ²
0,14 - 2,5 mm ²
0,5 mm ²
28-12
8-10
KT1 (0,4x2,5)

1000V
1 A
1 N 4007

Type	Order No	Qty.
NPP/SRD 2,5CA	451 169	50

Type	Order No	Qty.
APP/SRD 2,5CA	464 089	50

Type	Order No	Qty.
TF Ø2	493 020	5


Type	Order No	Qty.
CS 2,5/2	470 102	25
CS 2,5/3	470 103	20
CS 2,5/4	470 104	15
CS 2,5/5	470 105	10
CS 2,5/10	470 109	5
CS 2,5/20	470 170	10

6/3
1/A3
IP20/NA
D-NS 5,2x6, SLF-P1 W

50

PRD 2,5 CAD-B

Width: 5,2 mm

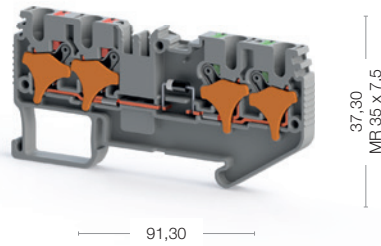

Cat No:

328 339
328 330

Voltage, V ~	Current, A	Cross-Section
500	1	2,5 mm ²
The max. current is determined by the diode. Installed: Diode 1N 4007, reverse voltage: 1300 V, maximum continuous current: 0.5 A.		

0,08 - 4 mm ²
0,14 - 2,5 mm ²
0,5 mm ²
28-12
8-10
KT1 (0,4x2,5)

1000V
1 A
1 N 4007

Type	Order No	Qty.
NPP/SRD 2,5CA	451 169	50

Type	Order No	Qty.
APP/SRD 2,5CA	464 089	50

Type	Order No	Qty.
TF Ø2	493 020	5

Type	Order No	Qty.
CS 2,5/2	470 102	25
CS 2,5/3	470 103	20
CS 2,5/4	470 104	15
CS 2,5/5	470 105	10
CS 2,5/10	470 109	5
CS 2,5/20	470 170	10

6/3
1/A3
IP20/NA
D-NS 5,2x6, SLF-P1 W

50
