


PRD 2,5 CLD-48V AC/DC PRD 2,5 CLD-110V AC/DC PRD 2,5 CLD-220V AC/DC

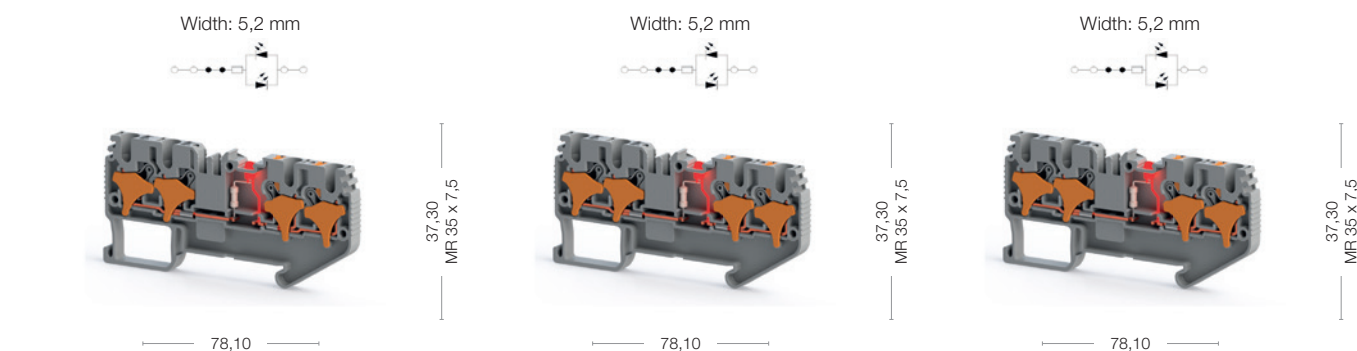

Cat No:

328 179
328 170

Voltage, V ~	Current, A	Cross-Section
48	24	2,5 mm ²

0,08 -4 mm ²
0,14 - 2,5 mm ²
0,5 mm ²
28-12
8-10
KT1 (0,4x2,5)

Type	Order No	Qty.
NPP / SRD 2.5C	451 189	50

Type	Order No	Qty.
APP / SRD 2.5C	464 119	50

Type	Order No	Qty.
TF Ø2	493 020	5

Type	Order No	Qty.
CS 2,5/2	470 102	25
CS 2,5/3	470 103	20
CS 2,5/4	470 104	15
CS 2,5/5	470 105	10
CS 2,5/10	470 109	5
CS 2,5/20	470 170	10

8/3
1/A3
IP20/NA
D-NS 5,2x6, SLF-P1 W

50

Cat No:

328 199
328 190

Voltage, V ~	Current, A	Cross-Section
110	24	2,5 mm ²

0,08 -4 mm ²
0,14 - 2,5 mm ²
0,5 mm ²
28-12
8-10
KT1 (0,4x2,5)

Type	Order No	Qty.
NPP / SRD 2.5C	451 189	50

Type	Order No	Qty.
APP / SRD 2.5C	464 119	50

Type	Order No	Qty.
TF Ø2	493 020	5

Type	Order No	Qty.
CS 2,5/2	470 102	25
CS 2,5/3	470 103	20
CS 2,5/4	470 104	15
CS 2,5/5	470 105	10
CS 2,5/10	470 109	5
CS 2,5/20	470 170	10

8/3
1/A3
IP20/NA
D-NS 5,2x6, SLF-P1 W

50

Cat No:

328 219
328 210

Voltage, V ~	Current, A	Cross-Section
220	24	2,5 mm ²

0,08 -4 mm ²
0,14 - 2,5 mm ²
0,5 mm ²
28-12
8-10
KT1 (0,4x2,5)

Type	Order No	Qty.
NPP / SRD 2.5C	451 189	50

Type	Order No	Qty.
APP / SRD 2.5C	464 119	50

Type	Order No	Qty.
TF Ø2	493 020	5

Type	Order No	Qty.
CS 2,5/2	470 102	25
CS 2,5/3	470 103	20
CS 2,5/4	470 104	15
CS 2,5/5	470 105	10
CS 2,5/10	470 109	5
CS 2,5/20	470 170	10

8/3
1/A3
IP20/NA
D-NS 5,2x6, SLF-P1 W

50