
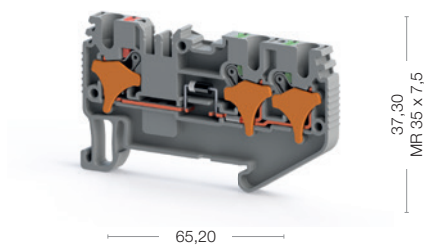


PRD 2,5 ED-B

Width: 5,2 mm




37,30
MR 35 x 7,5

65,20

PRD 2,5 ET

Width: 5,2 mm

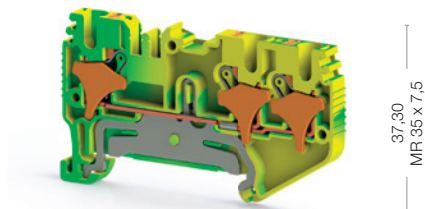

37,30
MR 35 x 7,5

65,20

Cat No:

328 109
328 100

Voltage, V ~	Current, A	Cross-Section
800	1	2,5 mm ²
The max. current is determined by the diode. Installed: Diode 1N 4007, reverse voltage: 1300 V, maximum continuous current: 0.5 A.		

0,08 -4 mm ²
0,14 - 2,5 mm ²
0,5 mm ²
28-12
8-10
KT1 (0,4x2,5)

Type	Order No	Qty.
NPP / SRD 2.5E	451 159	50

Type	Order No	Qty.
APP / SRD 2.5E	464 079	50

Type	Order No	Qty.
TF Ø2	493 020	5

Type	Order No	Qty.
CS 2,5/2	470 102	25
CS 2,5/3	470 103	20
CS 2,5/4	470 104	15
CS 2,5/5	470 105	10
CS 2,5/10	470 109	5
CS 2,5/20	470 170	10

8/3
1/A3
IP20/NA
D-NS 5,2x6, SLF-P1 W

50

Cat No:

337 630

Voltage, V ~	Current, A	Cross-Section
		2,5 mm ²

0,08 -4 mm ²
0,14 - 2,5 mm ²
0,5 mm ²
28-12
8-10
KT1 (0,4x2,5)

Type	Order No	Qty.
NPP / SRD 2.5E	451 152T	50

Type	Order No	Qty.
APP / SRD 2.5E	464 079	50

Type	Order No	Qty.
TF Ø2	493 020	5

Type	Order No	Qty.

8/3
1/A3
IP20/PE
D-NS 5,2x6, SLF-P1 W

50
