

Stop


Spring to Pin

Series Terminals

CTP: Clamp to Pin,
PTP: Pin to Pin

CTP 2.5

Width: 5,2 mm

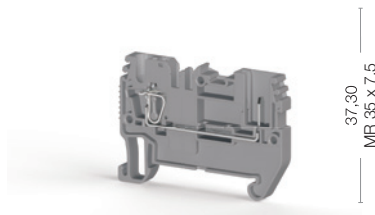


37,30
MR 35 x 7,5

Cat No: 51,60

PTP 2.5

Width: 5,2 mm

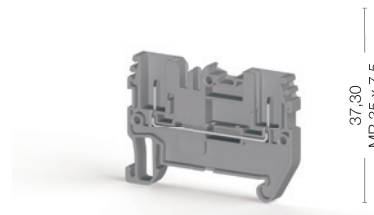

37,30
MR 35 x 7,5

Cat No: 51,60

310 129
310 120
310 121

310 109
310 100
310 101



Electrical Ratings

IEC (EN 60947-7-1/EN 60947-7-2)
UL
VDE (IEC 60947-7-1)
CSA
ATEX

Voltage, V ~	Current, A	Cross-Section
500	24	2,5 mm ²
300	20	AWG 28-12

Voltage, V ~	Current, A	Cross-Section
500	24	2,5 mm ²
300	20	AWG 28-12

Connection Data

Conductor cross section solid (min.-max.)
Conductor cross section stranded (min.-max.)
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve
AWG Conductor
Insulation Stripping Length (min.-max.)
Screwdriver

0,08 - 4 mm ²
0,14 - 2,5 mm ²
0,5 mm ²
28-12
8-10 mm

0,08 - 4 mm ²
0,14 - 2,5 mm ²
0,5 mm ²
28-12
8-10 mm

End Plate



Type	Order No	Qty.
NPP/CTP 2,5	451 059	50

Type	Order No	Qty.
NPP/CTP 2,5	451 059	50


Partition Plate



Type	Order No	Qty.
APP/SRD 2,5	464 029	50

Type	Order No	Qty.
APP/SRD 2,5	464 029	50

Test Plug



Type	Order No	Qty.

Type	Order No	Qty.

Cross Connection



Type	Order No	Qty.
CS 2,5 / 2	470 102	25
CS 2,5 / 3	470 103	20
CS 2,5 / 4	470 104	15
CS 2,5 / 5	470 105	10
CS 2,5 / 10	470 109	5
CS 2,5 / 20	470 170	10

Type	Order No	Qty.
CS 2,5 / 2	470 102	25
CS 2,5 / 3	470 103	20
CS 2,5 / 4	470 104	15
CS 2,5 / 5	470 105	10
CS 2,5 / 10	470 109	5
CS 2,5 / 20	470 170	10

Technical Data

Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type
Marking Tags (Dekafix)
See pages 326-333 for a list of Dekafix

6/3
1/A3
IP20/NA
D-NS 5,2x6, SLF-P1 W

6/3
1/A3
IP20/NA
D-NS 5,2x6, SLF-P1 W

Package Quantity

--

50

50
