


Screw Type Multilevel Terminals


PUK 3

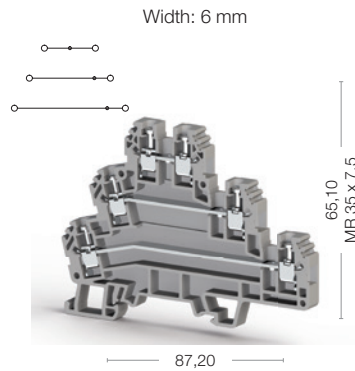

Cat No:

324 109
324 100


PUK 2 T

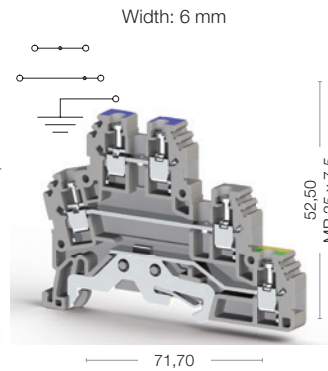

Cat No:

324 209
324 200

PUK 3 T

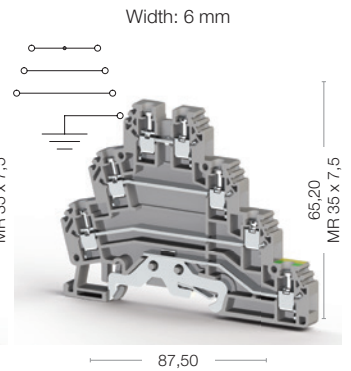

Cat No:

324 309
324 300



Electrical Ratings	Voltage, V ~	Current, A	Cross-Section
CE (EN 60947-7-1 - EN 60947-7-2)	440	24	2,5 mm ²
UL	300	24	AWG 24-12
VDE (IEC 60947-7-1)			
CSA			
ATEX	400	21	0,5-2,5 mm ²

Connection Data			
Conductor cross section solid (min.-max.)	0,2-4 mm ²	0,2-4 mm ²	0,2-4 mm ²
Conductor cross section stranded (min.-max.)	0,2-4 mm ²	0,2-4 mm ²	0,2-4 mm ²
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, (min.-max.)	0,5-1,5 mm ²	0,5-1,5 mm ²	0,5-1,5 mm ²
AWG Conductor	AWG 24-12	AWG 24-12	AWG 24-12
Insulation Stripping Length (min.-max.)	7-8 mm	7-8 mm	7-8 mm
Torque (min.-max.)	0,4-0,6 Nm	0,4-0,6 Nm	0,4-0,6 Nm
Screwdriver	IKTD 3 (0,6x3,5)	IKTD 3 (0,6x3,5)	IKTD 3 (0,6x3,5)

End Plate	Type	Order No	Qty.
	NPP/PUK 3	450 139	10

Type	Order No	Qty.
NPP/PUK 2 T	450 149	10

Type	Order No	Qty.
NPP/PUK 3 T	450 159	10

Cross Connection	Type	Order No	Qty.
	UK 2,5/2	480 132	25
	UK 2,5/3	480 133	20
	UK 2,5/4	480 134	15
	UK 2,5/10	480 139	5
	UK 2,5/35	480 140	5

Type	Order No	Qty.
UK 2,5/2	480 132	25
UK 2,5/3	480 133	20
UK 2,5/4	480 134	15
UK 2,5/10	480 139	5
UK 2,5/35	480 140	5

Type	Order No	Qty.
UK 2,5/2	480 132	25
UK 2,5/3	480 133	20
UK 2,5/4	480 134	15
UK 2,5/10	480 139	5
UK 2,5/35	480 140	5

Technical Data			
Rated Impulse Voltage / Pollution severity	6/3	6/3	6/3
Insulation material group / Gauge pin code according to IEC 60947-1	1/A3	1/A3	1/A3
Protection class / Protection conductor type	IP 20 / -	IP 20 / PE	IP 20 / PE
Marking Tags (Dekafix)			
See pages 326-333 for a list of Dekafix	DB 5	DB 5	DB 5

Package Quantity			
	20 pcs.	20 pcs.	20 pcs.