


Screw Type Sensor Terminals


PUK 3 S

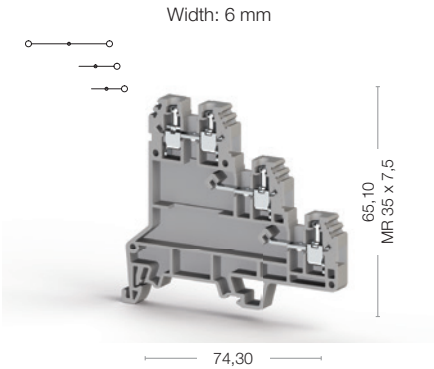

Cat No:

- 324 409
- 324 400

PUK 3 SLD (NPN)

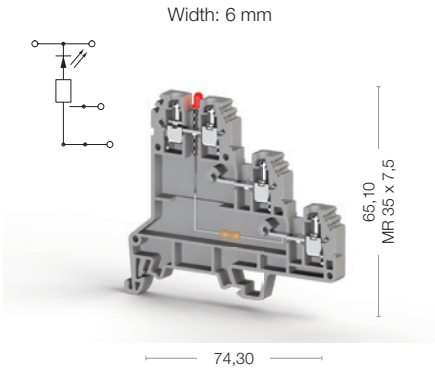

Cat No:

- 324 419
- 324 410



Electrical Ratings
CE (EN 60947-7-1)
UL
VDE (IEC 60947-7-1)
CSA
ATEX

Connection Data
Conductor cross section solid (min.-max.)
Conductor cross section stranded (min.-max.)
2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, (min.-max.)
AWG Conductor
Insulation Stripping Length (min.-max.)
Torque (min.-max.)
Screwdriver

End Plate

Cross Connection

Technical Data
Rated Impulse Voltage / Pollution severity
Insulation material group / Gauge pin code according to IEC 60947-1
Protection class / Protection conductor type
Marking Tags (Dekafix)
See pages 326-333 for a list of Dekafix

Package Quantity
20 pcs.

Voltage, V ~	Current, A	Cross-Section
500	24	2,5 mm²
300	24	AWG 24-12

0,2-4 mm²
0,2-4 mm²
0,5-1,5 mm²
AWG 24-12
7-8 mm
0,4-0,6 Nm
IKTD 3 (0,6x3,5)

Type	Order No	Qty.
NPP/PUK 3 S	450 169	10

Type	Order No	Qty.
UK 2,5/2	480 132	25
UK 2,5/3	480 133	20
UK 2,5/4	480 134	15
UK 2,5/10	480 139	5
UK 2,5/35	480 140	5

6/3
1/A3
IP 20 / -
DB 5

Voltage, V ~	Current, A	Cross-Section
24	24	2,5 mm²
300	24	AWG 24-12

0,2-4 mm²
0,2-4 mm²
0,5-1,5 mm²
AWG 24-12
7-8 mm
0,4-0,6 Nm
IKTD 3 (0,6x3,5)

Type	Order No	Qty.
NPP/PUK 3 S	450 169	10

Type	Order No	Qty.
UK 2,5/2	480 132	25
UK 2,5/3	480 133	20
UK 2,5/4	480 134	15
UK 2,5/10	480 139	5
UK 2,5/35	480 140	5

6/3
1/A3
IP 20 / -
DB 5

Package Quantity
20 pcs.