

Stop

Spring to Pin

Series Terminals


CTP: Clamp to Pin,
PTP: Pin to Pin

- Can be used with Klemmsan products only




SG-PT 2.5

Width: 5,2 mm

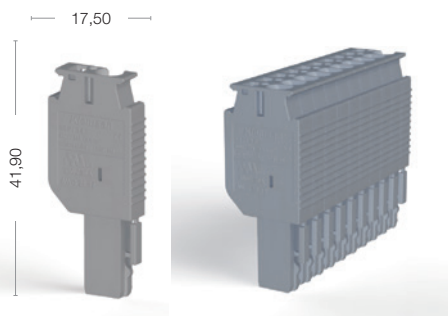

SG-PT 2.5 CS

Width: 5,2 mm

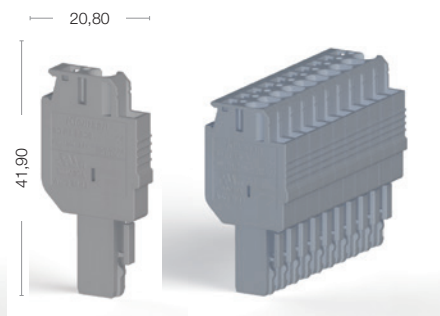

Electrical Ratings

CE (IEC 61984 / IEC 60947-7-1)
UL

Voltage, V ~

500

300

Current, A

24

20

Cross-Section

2,5 mm²

AWG 28-12

Voltage, V ~

500

300

Current, A

24

20

Cross-Section

2,5 mm²

AWG 28-12

Connection Data

Conductor cross section solid (min.-max.)

Conductor cross section stranded (min.-max.)

2 conductors with same cross section, stranded,
TWIN ferrules with plastic sleeve

AWG Conductor

Insulation Stripping Length (min.-max.)

0,08 - 4 mm²

0,14 - 2,5 mm²

0,5 mm²

28-12

8-10 mm

0,08 - 4 mm²

0,14 - 2,5 mm²

0,5 mm²

28-12

8-10 mm

Cross Connection



Type

Order No

Qty.

CS 2,5 / 2	470 102	25
CS 2,5 / 3	470 103	20
CS 2,5 / 4	470 104	15
CS 2,5 / 5	470 105	10
CS 2,5 / 10	470 109	5

Technical Data

Rated Impulse Voltage / Pollution severity

Insulation material group /
Gauge pin code according to IEC 60947-1

Protection class / Protection conductor type

6/3

1/A3

IP 20 / -

6/3

1/A3

IP 20 / -

Ordering Data



SG-PT 2.5CS-1



SG-PT 2.51



SG-PT 2.5AN-1





SG-PT 2.5DB-1

Type	Order No	Qty.
SG-PT 2.5-1	310 209	50
SG-PT 2.5-2	310 219	50
SG-PT 2.5-3	310 229	50
SG-PT 2.5-4	310 239	50
SG-PT 2.5-5	310 249	50
SG-PT 2.5-6	310 259	25
SG-PT 2.5-7	310 269	25
SG-PT 2.5-8	310 279	25
SG-PT 2.5-9	310 289	25
SG-PT 2.5-10	310 299	25
SG-PT 2.5-11	310 309	10
SG-PT 2.5-12	310 319	10
SG-PT 2.5-13	310 329	10
SG-PT 2.5-14	310 339	10
SG-PT 2.5-15	310 349	10
SG-PT 2,5/1L	310 359	50
SG-PT 2,5G/1M	310 369	50
SG-PT 2,5G/1R	310 379	50
SG-PT 2.5-1	310 202T	50
SG-PT 2.5-1L	310 352T	50
SG-PT 2.5G-1M	310 362T	50
SG-PT 2.5G-1R	310 372T	50

Type	Order No	Qty.
SG-PT 2.5CS-1	310 389	50
SG-PT 2.5CS-2	310 399	50
SG-PT 2.5CS-3	310 409	50
SG-PT 2.5CS-4	310 419	50
SG-PT 2.5CS-5	310 429	50
SG-PT 2.5CS-6	310 439	25
SG-PT 2.5CS-7	310 449	25
SG-PT 2.5CS-8	310 459	25
SG-PT 2.5CS-9	310 469	25
SG-PT 2.5CS-10	310 479	25
SG-PT 2.5CS-11	310 489	10
SG-PT 2.5CS-12	310 499	10
SG-PT 2.5CS-13	310 509	10
SG-PT 2.5CS-14	310 519	10
SG-PT 2.5CS-15	310 529	10
SG-PT 2,5CS/1L	310 539	50
SG-PT 2,5GCS/1M	310 549	50
SG-PT 2,5GCS/1R	310 559	50
SG-PT 2.5CS-1	310 382T	50
SG-PT 2.5CS-1L	310 532T	50
SG-PT 2.5GCS-1M	310 542T	50
SG-PT 2.5GCS-1R	310 552T	50

Just combine single units of **L-R**
products for left and right ends, add
desired quantities of **M** products
in-between to make your custom sockets.



Marking Tags (Dekafix):

See pages 326-333 for usage of Dekafix / D-NS 5,2x6,
SLF-P2 W, KCSLF-W 4,9x100mm