


TRV 4 M

Width: 15 mm




Cat No:

422 047

TRV 4 S

Width: 12,50 mm




Cat No:

422 027

TRV 4 T

Width: 12 mm




Cat No:

422 060

TRV 10

Width: 22 mm

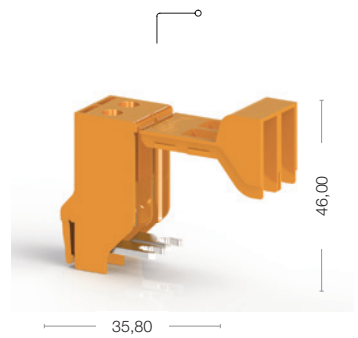

Cat No:

422 037

Voltage, V ~	Current, A	Cross-Section
750	25	4 mm ²
600	20	AWG 26-10

0,2-6 mm ²
0,2-6 mm ²
0,5-2,5 mm ²
AWG 24-10
9-10 mm
0,5-0,8 Nm
IKTD 3 (0,6x3,5)

8/3
1/B4
IP 20 / -
DB 7,5x4,5, DG 7/5, D-NS 7x5

50 pcs.

Voltage, V ~	Current, A	Cross-Section
500	10	4 mm ²
300	10	AWG 26-10

0,2-6 mm ²
0,2-6 mm ²
0,5-2,5 mm ²
AWG 24-10
9-10 mm
0,5-0,8 Nm
IKTD 3 (0,6x3,5)

8/3
1/B4
IP 20 / -
D-NS 5x6, DB 5, DB 7,5x4,5, DG 6/5, D-NS 7x5

50 pcs.

Voltage, V ~	Current, A	Cross-Section
		4 mm ²
		AWG 26-10

0,2-6 mm ²
0,2-6 mm ²
0,5-2,5 mm ²
AWG 24-10
9-10 mm
0,5-0,8 Nm
IKTD 3 (0,6x3,5)

8/3
1/B4
IP 20 / -
DB 7,5x4,5, DG 7/5, D-NS 7x5


50 pcs.

Voltage, V ~	Current, A	Cross-Section
750	63	10 mm ²
600	55	AWG 16-6

0,5-16 mm ²
0,5-16 mm ²
0,5-6 mm ²
AWG 20-6
11-12 mm
1,2-1,8 Nm
IKTD 4 (0,8x40)

8/3
1/B6
IP 20 / -
DB 7,5x4,5, DG 7/5, D-NS 7x5

25 pcs.

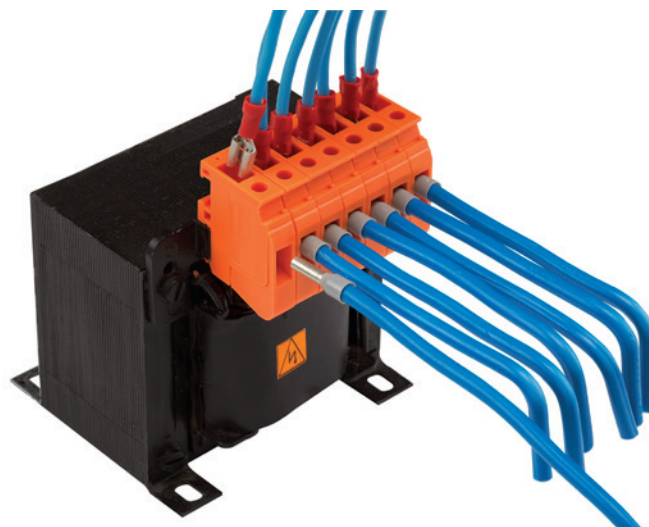

Color			
Color code is the last digit of the order number			
Grey	Green- Yellow	Orange	Beige
304 119	60	17	10